

Duplex Cable, Plenum

Features and Benefits

- 2mm OD tight buffered fiber
- Available in custom colors



Description

This Cable is composed of a tight buffered optical fiber, aramid yarn, and a PVC outer jacket. All component materials meet the EU RoHS and REACH Directive standards.

This Duplex Cable is available in 12 TIA standard colors or special order colors. UL Listed OFNP cables are available, and unrated cables may be supplied to accommodate special needs. Standard surface print denotes construction, NEC rating, and fiber type, and includes footage markers. Custom print may also be accommodated.

Application
Plenum

Flame Rating
NFPA 262

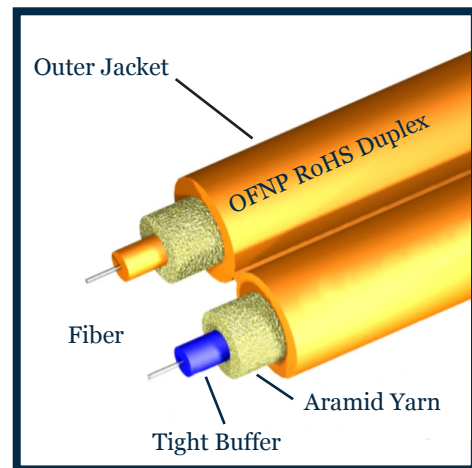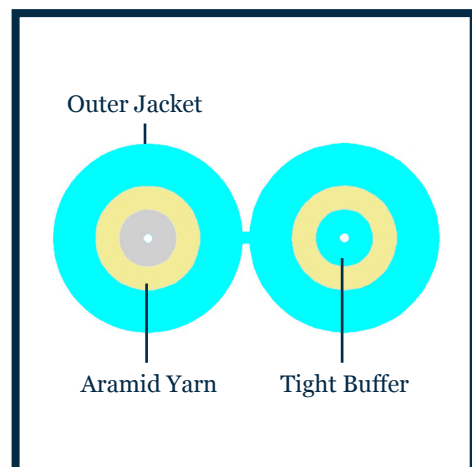

Purchase at

LANshack

Sales@LANshack.com | 888-568-1230

SPECIFICATIONS

Temperature Range	
Storage Temperature	-40 C to +70 C
Operating Temperature	0 C to +70 C

Cable Characteristics	
Fiber Count	2
Outer Jacket Material	Flame Retardant PVC
Outer Jacket Color	Available in 12 TIA/EIA color standard
Strength Member	Aramid Yarn
Tight Buffer Material	Flame Retardant PVC
Tight Buffer Color	White & Aqua for (MM 50/125 fiber), Orange for (SM 9/125 and MM 62.5/125 fiber)

Physical Characteristics	
Nominal Outer Diameter (mm)	1.95 x 4.05
Minimum Bend Radius (mm) (Bend Insensitive SM 1 turn)	10
Minimum Bend Radius (mm) (Bend Insensitive MM)	7.5

Optical Characteristics						
Items	Single Mode	OM1	OM2	OM3	OM4 (OM4+)	OM5 (WB MMF)
Core Size [μm]	9	62.5	50	50	50	50
Wavelength [nm]	1310/ 1550	850/ 1300	850/1300	850/ 1300	850/ 1300	850/ 1300
Max. Attenuation[dB/km]	0.5/ 0.4	3.5/ 1.5	3.5/1.5	3.0/ 1.0	3.0/ 1.0	3.0/ 1.0
Link Length[m]	10,000/5,000 (1/10Gb/s@1550nm)	300 (1Gb/s@850nm)	150 (10Gb/s@850nm)	300 (10Gb/s@850nm)	550(600) (10Gb/s@850nm)	550 (10Gb/s@850nm)
Bandwidth (EMB High Performance)[MHz.km]	–	220 @850	750@850	2,000 @850	4,700 @850	4,700@850

Fiber Type (9/125)	**	Fiber Type (50/125)	**	Fiber Type (62.5/125)	**
SMF-28 Ultra	CZ	ClearCurve OM2	C2	InfiniCor 300	C3
ClearCurve LBL	C7	Clear Curve OM3	CG		
ClearCurve ZBL	CC	ClearCurve OM4	C4		
		ClearCurve OM5	C5		