
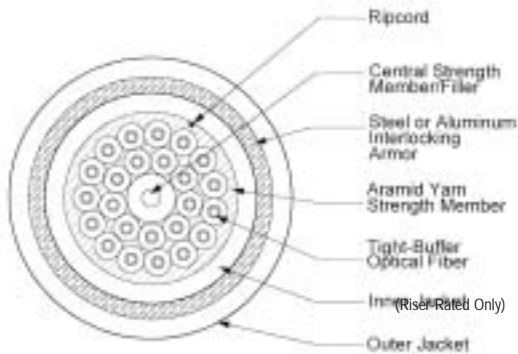


Interlocked Armor Cables

Aluminum Interlocked Armor, Plenum-Rated

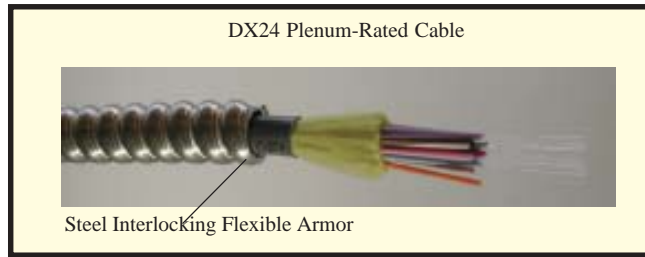

Available in all popular fiber types.

- ◆ Excellent crush and impact resistance
- ◆ Superior flexibility and bend limiting properties
- ◆ Complete rodent protection
- ◆ Saves installation cost - eliminates metallic conduits or raceways

Rugged tight-buffer design for ease of termination, installation and long life.

Ideal for:

- ◆ Industrial - factory applications
- ◆ Physical security applications
- ◆ Outdoor use in direct burial applications

General Characteristics for Interlocked Armor Plenum Cables

Minimum Bend Radius: Under Installation Tensile Load	20X outside diameter
Under Long-Term Tensile Load	15X outside diameter
Operating Temperature	-20° C to + 85° C (S) -40° C to + 85° C (K)
Storage Temperature	-40° C to + 85° C

DISTRIBUTED BY:

LANshack.com

Toll Free: 888-568-1230

E-mail: sales@lanshack.com