




# RG6 QUAD Shield CMR CATV 75 Ω Coaxial Cable

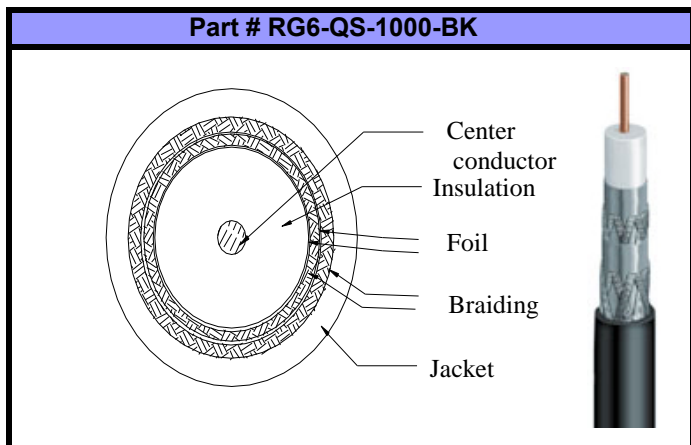

**Description**

RG-6/U QUAD CMR CATV 75 Ω Coaxial Cable

**Applicable Standards**

Reference Standard

SCTE IPS-SP-001

UL 1655, UL 13, UL 444, ROHS

**Physical Characteristics**

Conductor		C.C.S.
AWG		18
Diameter	(inches)	0.04
Insulation		Skin Foamed PE
Nom. Thickness	(inches)	0.073
Insulation Diameter	(inches)	0.186
First Braid Shield		Aluminum
Coverage Area	(%)	60
Second Braid Shield		Aluminum
Coverage Area	(%)	40
Jacket		FR-PVC
Cable Diameter	(inches)	0.2968
Nom. Thickness	(inches)	0.0255
Nominal Weight	500'	18 lbs.
	1000' (Pullbox & Reel)	35 lbs.

**Cable Marking**

RG6/U QUAD SHIELD 18AWG CMR FT4 XXXXXX VERIFIED TO C(ETL)US CATV SWEPT TO 3.0 GHZ \*\*\*\*FT

**Electrical Performance**

Frequency (MHz)	Attenuation (dB/100m)	Frequency (MHz)	Attenuation (dB/100m)
1	0.89	1000	22.00
10	2.90	1200	24.60
50	5.25	1450	27.20
100	7.20	1800	30.50
200	9.84	2200	32.80
400	14.10	2400	32.83
700	19.00	3000	37.88
900	21.00		

**Electrical Characteristics**

Temperature Rating	(°C)	-20 to 60
Impedence	(± 3.0 Ohms)	75
Capacitance	(pF/ft)	15.5
Conductor DCR@20° C	(ohms/1000ft)	28.6
Velocity of Propagation	(%)	84
ROHS Compliant		Yes



PURCHASE AT

**CONTACT**

SALES@LANSHACK.COM

888-568-1230