


NOTE:ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION

Rev.	Rev. Date	Modified By	Brief Description

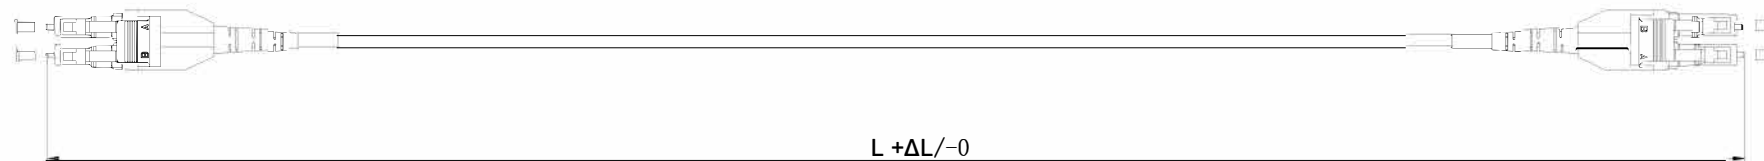

Specifications:

Type	DLC/UPC-DLC/UPC, Uniboot
Fiber Mode	OM3
Core Diameter(um)	50/125
Operating Wavelength(nm)	850/1300
Cable Color	Aqua
Cable Diameter(mm)	Ø3.0
Operating Temperature(°C)	-25~+70
Storage Temperature(°C)	-25~+70
Insertion loss(dB)	≤0.3
Return loss(dB)	≥35

L≤10m, TOLERANCES:0≤ΔL≤10cm

L > 10m, TOLERANCES:0≤ΔL≤1%*L



PURCHASE AT

CONTACT
SALES@LANSHACK.COM
888-568-1230

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
③				
②				
①				

Unless specified on the drawing, tolerances are per the follows:

.	+1
.x	+0.2
.xx	+0.05

DRAWN BY	DATE: 2018/01/23	DESCRIPTION: LC-LC-DX OM3 Patchcord
CHECKED BY	SHEET 1of 2	ITEM NO. SFPC-OM3-LCLCUB
APPROVED BY	SCALE 1:1	REV. 00 UNIT:mm

