
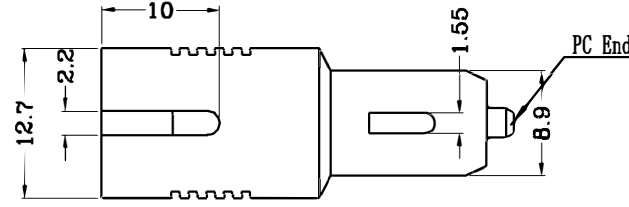



NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description

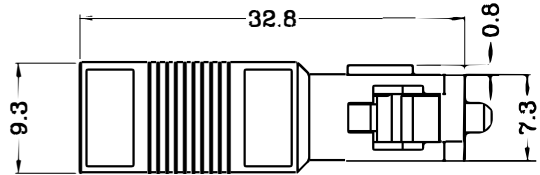

Specifications:

Parameter	Vale	Unit
Operating Wavelength	1310/1550±10	nm
Tolerance for 1~5 db Attenuation	±0.5	dB
Tolerance for 6~9 db Attenuation	±0.7	dB
Tolerance for 10~30 db Attenuation	±10	%
Operating Temperature	-40to+75	C
Polarization Dependent Loss	≤0.1	dB
Mating Durability	≥1000	cycle
Reversal Of Loss	≥50	dB
Input Optical Power	≤200	mW

Purchase @ [Contact Sales at 888-568-1230](mailto:Sales@LANshack.com)
or
Email us at Sales@LANshack.com

DRAWN BY	DATE: 2015/5/18	DESCRIPTION: SC/PC Attenuator
CHECKED BY	SHEET 1 of 1	ITEM NO.
APPROVED BY	SCALE 1:1	REV. 00 UNIT: mm

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
③				
②				
①				