
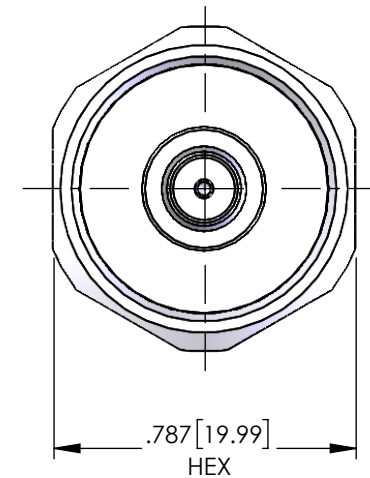
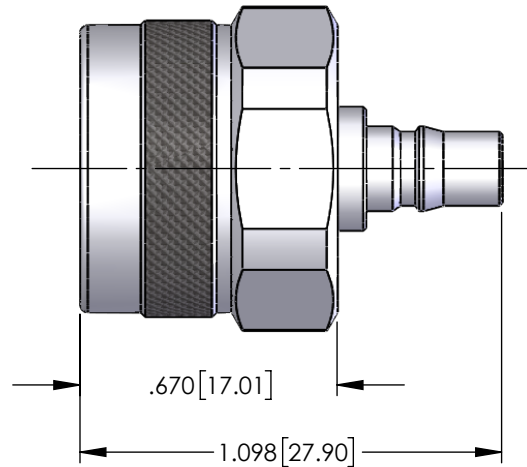


QT-RQA-5478

REV	DESCRIPTION	DATE	APPR
A	CHANGED CONTACT PIN - ECO/ECN# 1002	12/04/17	JDM



SPECIFICATIONS:

IMPEDANCE: 50 Ohms
 FREQUENCY RANGE: 0-6 GHz
 3RD ORDER IM: $\leq 155\text{dBc}$ @ 1900 MHz
 VSWR: 1.25 MAX.
 INSULATION RESISTANCE: 5k M Ohms min.
 TEMPERATURE RANGE: -65°C TO 165°C
 MATING CYCLES: > 100

6	N SHELL	1	012-10M-006-BT	Brass	WHITE BRONZE
5	N GASKET	1	028-10M-004-LR	Rubber	N/A
4	N RETAINING RING	1	027-10M-005-PT	PHOS. BRONZE	WHITE BRONZE
3	INSULATOR	1	010-54X-001-TX	PTFE	NONE
2	QMA-SMA PIN	1	009-50X-001-CS	BeCu	SILVER
1	QMA-SMA BODY	1	001-50X-001-BW	Brass	WHITE BRONZE
#	DESCRIPTION	QTY	PART NUMBER	MATERIAL	FINISH

<div>ROHS</div> <div>COMPLIANT</div>		NAME	DATE	<div>LANshack</div> <div>Sales@LANshack.com 888-568-1230</div>			
		DRAWN	C. ZUNIGA	12/04/17			
		CHECKED					
UNLESS OTHERWISE SPECIFIED:		ENG APPR.			TITLE:		
DIMENSIONS ARE IN INCHES	<div>PROPRIETARY AND CONFIDENTIAL</div> <div>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF RF INDUSTRIES. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF RF INDUSTRIES IS STRICTLY PROHIBITED.</div>						
ALL DIMENSIO S ARE FOR REFERENCE ONLY							
CABLE GROUP	N/A	SIZE				DWG. NO.	REV
CODE		A				QT-RQA-5478	A
		SCALE: NTS			NOTES:		SHEET 1 OF 1