




THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES.
ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED
WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES.
ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.


ALL DIMENSIONS ARE REFERENCE ONLY

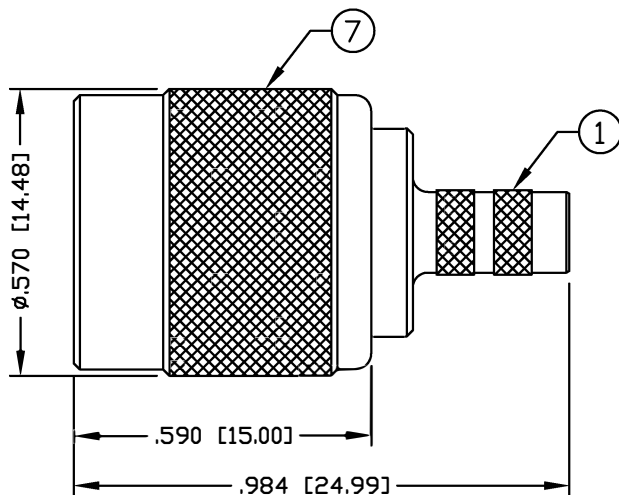

RECOMMENDED CRIMP DIE: .068"



RECOMMENDED CRIMP DIE: .213"

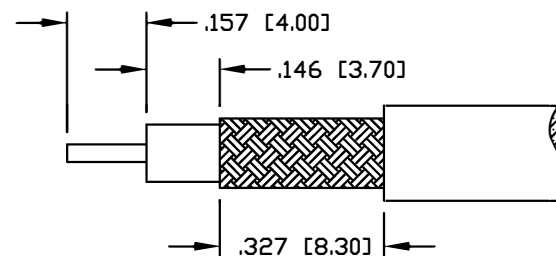

RECOMMENDED STRIPPING INSTRUCTIONS

SPECIFICATIONS:

IMPEDANCE: 50 Ohms
FREQUENCY RANGE: 0-7 GHz
WORKING VOLTAGE: 500 V rms @ sea level
INSULATION RESISTANCE: 5k M ohms min.
TEMPERATURE RANGE: -65°C TO +85°C
FOR RG-58, 58A, 58C, 141, 141A, BELDEN 8240, 9907
8259, 8262, 9201, 9203, 9310, 9311 & COMM/SCOPE 0268

1	BODY	1	BRASS	NICKEL, 100μ"	008974
2	INSULATOR	1	DELRIN	----	
3	WASHER	1	BRASS	NICKEL, 100μ"	
4	RING	1	DELRIN	----	
5	RETAINING RING	1	BRASS	NICKEL, 100μ"	
6	GASKET	1	RUBBER	----	
7	SHELL	1	BRASS	NICKEL, 100μ"	
8	PIN	1	BRASS	GOLD, 3μ"	
9	FERRULE	1	BRASS	NICKEL, 100μ"	
10					DRAWN
11					C. ZUNIGA
12					CHECKED
13					ORJ DRAWN
14					C. ZUNIGA
#	DESCRIPTION	QTY	MATERIAL	FINISH	APPROVALS
					DATE

RoHS
COMPLIANT

DIMENSIONS ARE IN INCHES
AND [MILLIMETERS]
UNLESS OTHERWISE NOTED
TOLERANCES ARE:
DECIMALS DIAMETER

PART NO.

QT-RFT-1202-2

REV	DESCRIPTION	DWN	DATE	APPROVED
A	ENGINEERING RELEASE	CZS	11/11/97	R. RICE
B	UPDATE CONNECTOR DESIGN, DWG. FORMAT & SPECS	CZS	01/22/07	JDMc

LANshack
Sales@LANshack.com | 888-568-1230

TNC PLUG, CRIMP

SIZE A	CABLE GROUP C	DWG NO. QT-RFT_120_2	REV B
SCALE: NTS	CAD FILE	OUTLINE	SHEET 1 OF 1