




THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES.  
ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED  
WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES.  
ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

ALL DIMENSIONS ARE REFERENCE ONLY

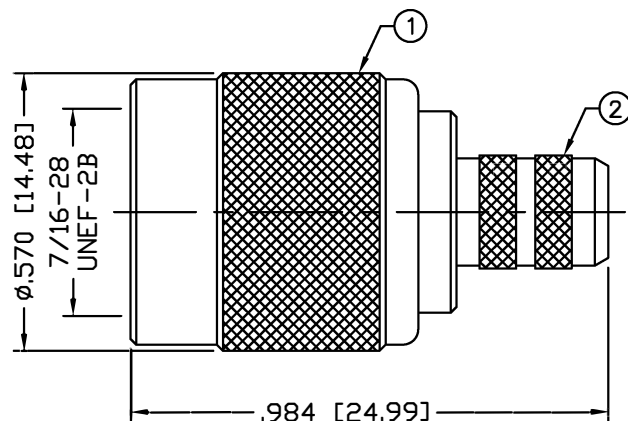


RECOMMENDED CRIMP DIE: .068



RECOMMENDED CRIMP DIE: .255

### SPECIFICATIONS:

IMPEDANCE: 50 Ohms  
FREQUENCY RANGE: 0-7 GHz  
WORKING VOLTAGE: 500 V rms @ sea level  
INSULATION RESISTANCE: 5k M ohms min.  
TEMPERATURE RANGE: -65°C TO +165°C  
FOR RG-8/X, BELDEN 9258, MAXRAD M8X-100 &  
M8X-1000, MICRO 8/U, REMEE 1600, SAXTON 8315 &  
TIMES LMR-240 & LMR-240 ULTRAFLEX CABLE

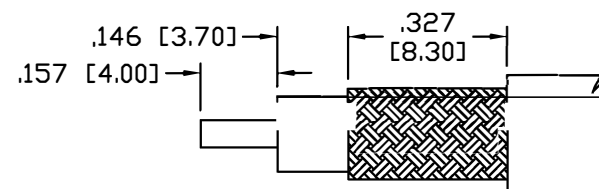

RECOMMENDED STRIPPING DIMENSIONS

|    |                |     |          |               |           |          |
|----|----------------|-----|----------|---------------|-----------|----------|
| 1  | SHELL          | 1   | BRASS    | NICKEL, 100μ" | 008974    |          |
| 2  | BODY           | 1   | BRASS    | NICKEL, 100μ" |           |          |
| 3  | INSULATOR      | 1   | DELFIN   | ----          |           |          |
| 4  | GASKET         | 1   | RUBBER   | ----          |           |          |
| 5  | RETAINING RING | 1   | BRASS    | NICKEL, 100μ" |           |          |
| 6  | RING           | 1   | DELFIN   | ----          |           |          |
| 7  | WASHER         | 1   | BRASS    | NICKEL, 100μ" |           |          |
| 8  | PIN            | 1   | BRASS    | GOLD, 3μ"     |           |          |
| 9  | FERRULE        | 1   | BRASS    | NICKEL, 100μ" |           |          |
| 10 |                |     |          |               | DRAWN     | 4/12/06  |
| 11 |                |     |          |               | C. ZUNIGA |          |
| 12 |                |     |          |               | CHECKED   |          |
| 13 |                |     |          |               |           |          |
| 14 |                |     |          |               | ORJ DRAWN | 11/11/97 |
|    |                |     |          |               | C. ZUNIGA |          |
| #  | DESCRIPTION    | QTY | MATERIAL | FINISH        | APPROVALS | DATE     |

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES  
AND [MILLIMETERS]  
UNLESS OTHERWISE NOTED  
TOLERANCES ARE:  
DECIMALS      DIAMETER

**LANshack**  
Sales@LANshack.com | 888-568-1230

## TNC PLUG, CRIMP

|            |                  |                          |              |
|------------|------------------|--------------------------|--------------|
| SIZE<br>A  | CABLE GROUP<br>X | DWG NO<br>QT-RFT-1203-1X | REV<br>C     |
| SCALE: NTS | CAD FILE         | OUTLINE                  | SHEET 1 OF 1 |