
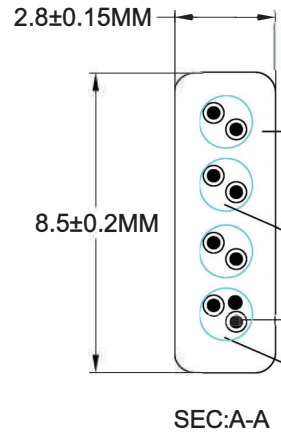


NOTE:ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rec.	Rec. Date	Modified By	Brief Description

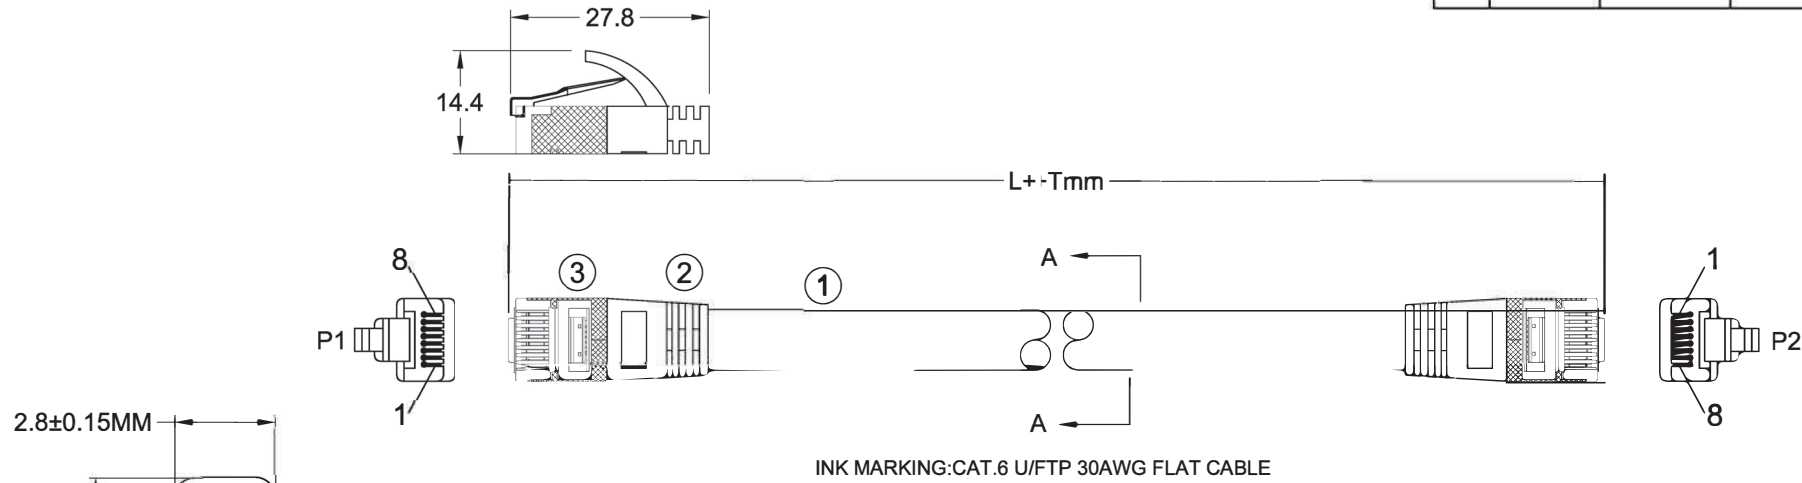

JACKET:CM PVC Thickness:0.55±0.1mm
OD=8.5±0.2*2.8±0.15mm

CONDUCTOR:[30AWG(7/0.10±0.008mmBC)+AL/MYLAR]*3P

INSULATION:HDPE Thickness: 0.12±0.05mm
OD=0.9±0.05mm

CONDUCTOR:[30AWG(7/0.10±0.008mmBC)+DRAIN
+AL/MYLAR]*1P

orange 1	green 2
white/orange	white/orange
blue 3	brown 4
white/blue	white/brown

PINOUT		
P1	WIRE	P2
1	WHITE/ORANGE	1
2	ORANGE	2
3	WHITE/GREEN	3
6	GREEN	6
5	WHITE/BLUE	5
4	BLUE	4
7	WHITE/BROWN	7
8	BROWN	8

LANshack
Sales@LANshack.com | 888-568-1230

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
③	RJ45 PLUG	8P8C 50U" GOLD PLATED TWO-PIECE PLUG.		
②	MOLDED	PVC MOLDED BOOT .		
①	CABLE	FLAT CAT.6 U/FTP PVC 30AWG*4P BC		

DRAWN BY FW	DATE: 2022/07/04	DESCRIPTION: Cat 6 Shielded Flat 30AWG Stock Ethernet Patch Cable
CHECKED BY ACE	SHEET 1 of 2	ITEM NO. 5EPC-C65-F
APPROVED BY	SCALE 1:1	REC. 00 UNIT: mm