




Single Jacket/Single Armor, Gel-Free, Outdoor Stranded Loose Tube Cable

- Corrugated steel tape armor is strong yet flexible, providing additional crush and rodent protection

Representative Image

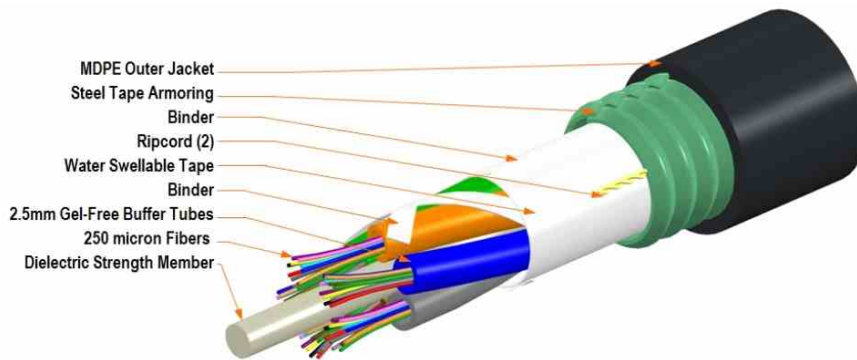

General Specifications

Cable Type	Stranded loose tube
Construction Type	Armored
Subunit Type	Gel-free

Construction Materials

Fiber Type Solution	LazrSPEED®
Jacket Material	PE Polyethylene
Total Fiber Count	2-24 Strands
Armor Type	Corrugated steel
Fiber Type	OM1 62.5/125, OM3 & 4 50/125, Singlemode
Fiber Type, quantity	
Fibers per Subunit, quantity	
Jacket Color	Black
Jacket UV Resistance	UV stabilized

Purchase at

LANshack

Sales@LANshack.com | 888-568-1230

760053611 | D006LA-5LF06NS

Minimum Bend Radius, loaded	17.3 cm		6.8 in
Minimum Bend Radius, unloaded	11.5 cm		4.5 in
Tensile Load, long term, maximum	800 N		180 lbf
Tensile Load, short term, maximum	2700 N		607 lbf
Vertical Rise, maximum	760.0 m		2494.0 ft

Environmental Specifications

Environmental Space	Aerial, lashed		Buried
Installation Temperature	-30 °C to +70 °C (-22 °F to +158 °F)		
Operating Temperature	-40 °C to +70 °C (-40 °F to +158 °F)		
Storage Temperature	-40 °C to +75 °C (-40 °F to +167 °F)		

Mechanical Test Specifications

Compression	250 lb/in		44 N/mm
Compression Test Method	FOTP-41		IEC 60794-1 E3
Flex	35 cycles		
Flex Test Method	FOTP-104		IEC 60794-1 E6
Impact	2.17 ft lb		2.94 N-m
Impact Test Method	FOTP-25		IEC 60794-1 E4
Strain	See long and short term tensile loads		
Strain Test Method	FOTP-33		IEC 60794-1 E1
Twist	10 cycles		
Twist Test Method	FOTP-85		IEC 60794-1 E7
Water Penetration	24 h		
Water Penetration Test Method	FOTP-82		IEC 60794-1 F5

Environmental Test Specifications

Cable Freeze	-2 °C		28 °F
Cable Freeze Test Method	FOTP-98		IEC 60794-1 F15
Heat Age	-40 °C to +85 °C (-40 °F to +185 °F)		
Heat Age Test Method	IEC 60794-1 F9		
Low High Bend	-30 °C to +60 °C (-22 °F to +140 °F)		
Low High Bend Test Method	FOTP-37		IEC 60794-1 E11
Temperature Cycle	-40 °C to +70 °C (-40 °F to +158 °F)		
Temperature Cycle Test Method	FOTP-3		IEC 60794-1 F1

Qualification Specifications

Cable Qualification Standards	ANSI/ICEA S-87-640		EN 187105		Telcordia GR-20
-------------------------------	--------------------	--	-----------	--	-----------------

Regulatory Compliance/Certifications

Agency	Classification
RoHS 2011/65/EU	Compliant
ISO 9001:2008	Designed, manufactured and/or distributed under this quality management system

Purchase at

LANshack

Sales@LANshack.com | 888-568-1230

LazrSPEED® 300 OM3 Bend-Insensitive Multimode Fiber

LazrSPEED® 300

Product Classification

Portfolio	CommScope®
Product Type	Optical fiber

General Specifications

Cladding Diameter	125 µm
Cladding Diameter Tolerance	±0.8 µm
Cladding Non-Circularity, maximum	1 %
Coating Diameter (Colored)	254 µm
Coating Diameter (Uncolored)	245 µm
Coating Diameter Tolerance (Colored)	±7 µm
Coating Diameter Tolerance (Uncolored)	±10 µm
Coating/Cladding Concentricity Error, maximum	12 µm
Core Diameter	50 µm
Core Diameter Tolerance	±2.5 µm
Core/Clad Offset, maximum	1.5 µm
Proof Test	689.476 N/mm ² 100000 psi

Mechanical Specifications

Macrobending, 15 mm mandrel, 2 turns	0.20 dB @ 850 nm 0.50 dB @ 1,300 nm
Macrobending, 30 mm mandrel, 2 turns	0.10 dB @ 850 nm 0.30 dB @ 1,300 nm
Coating Strip Force, maximum	8.9 N 2.001 lbf
Coating Strip Force, minimum	1.3 N 0.292 lbf
Dynamic Fatigue Parameter, minimum	18

Purchase at

LANshack

Sales@LANshack.com | 888-568-1230

CS-5L-LT

Optical Specifications

Numerical Aperture	0.2
Numerical Aperture Tolerance	±0.015
Point Defects, maximum	0.15 dB
Zero Dispersion Slope, maximum	0.105 ps/[km-nm-nm]
Zero Dispersion Wavelength, maximum	1316 nm
Zero Dispersion Wavelength, minimum	1297 nm

Optical Specifications, Wavelength Specific

1 Gbps Ethernet Distance	1,020 m @ 850 nm 600 m @ 1,300 nm
10 Gbps Ethernet Distance	300 m @ 850 nm
Attenuation, maximum	1.00 dB/km @ 1,300 nm 3.00 dB/km @ 850 nm
Backscatter Coefficient	-68.0 dB @ 850 nm -75.7 dB @ 1,300 nm
Bandwidth, Laser, minimum	2,000 MHz-km @ 850 nm 500 MHz-km @ 1,300 nm
Bandwidth, OFL, minimum	1,500 MHz-km @ 850 nm 500 MHz-km @ 1,300 nm
Differential Mode Delay	0.70 ps/m @ 850 nm 0.88 ps/m @ 1,300 nm
Differential Mode Delay Note	Superior to TIA-492AAAC and IEC 60793-2-10 at 850 nm
Index of Refraction	1.479 @ 1,300 nm 1.483 @ 850 nm
Standards Compliance	TIA-492AAAC (OM3)

Environmental Specifications

Heat Aging, maximum	0.20 dB/km @ 85 °C
Temperature Dependence, maximum	0.1 dB/km
Temperature Humidity Cycling, maximum	0.2 dB/km
Water Immersion, maximum	0.20 dB/km @ 23 °C

Regulatory Compliance/Certifications

Agency	Classification
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system



* Footnotes

Purchase at

LANshack
Sales@LANshack.com | 888-568-1230

Page 2 of 3

CS-5L-LT

Temperature Dependence, maximum	Temperature dependence is conducted at -60 °C to +85 °C (-76 °F to +185 °F)
Temperature Humidity Cycling, maximum	Temperature humidity cycling is conducted at -10 °C to +85 °C (+14 °F to +185 °F) up to 95% relative humidity

Purchase at

LANshack

Sales@LANshack.com | 888-568-1230