





LC UPC Female to FC UPC Male UPC Singlemode 9/125 Simplex Fiber Optic Conversion Adapter

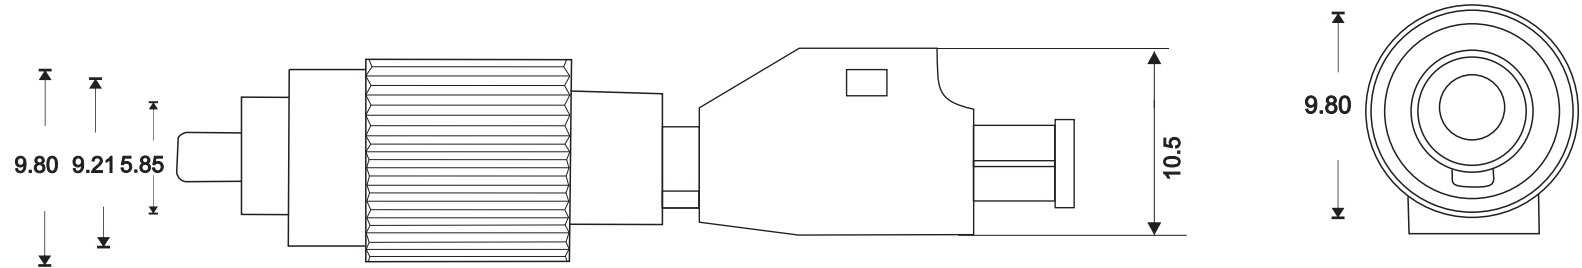

UNMARKED TOLERANCES

> 0~3mm	±0.05
> 3mm~18mm	±0.10
> 18mm~50mm	±0.15
> 50mm	±0.20
ANGLES ALL ±0.5°	

SPECIFICATIONS

Insertion Loss at 0 dB: ±0.3 dB

Return Loss Standard:

Singlemode UPC ≥ 45 dB

Singlemode APC ≥ 55 dB

Test Wavelengths: 1310 nm / 1550 nm

Ceramic Sleeve Material: Zirconia ceramic

Operating Temperature: -40 °C ~ +85 °C

Color: Green with Blue and Silver

Appearance: Clean and smooth; free of oil, burrs, cracks, deformation, rust, or other defects

Compliance: Raw materials comply with RoHS 2.0 requirements

P/N QT-FOCA-LCUF-FCUM-SM-SX	Product Title: LC UPC Female to FC UPC Male UPC Singlemode 9/125 Simplex Fiber Optic Conversion Adapter by QuickTrex®
Units : mm	Third Angle Projection :