


8 Port Full Gigabit Managed PoE Switch

8*1000M POE+2*GE SFP Managed PoE Switch

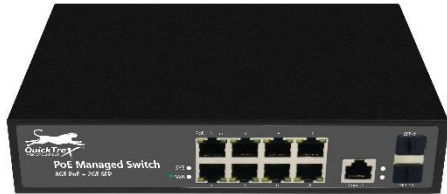

- 8*10/100/1000M + 2*100/1000M SFP slot Managed PoE Switch, 1-8 ports support IEEE 802.3af/at;
- Comply with IEEE 802.3, IEEE 802.3u, IEEE 802.3ab, IEEE 802.3z standards;
- PoE port support AF/AT intelligent recognition. Standard power is 15.4W/port, Maximum power: 30W/port;
- Support QOS, STP/RSTP, IGMP, DHCP, SNMP, WEB, VLAN, ERPS etc.;
- POE port can be real-time network management, timed on/off, can force POE working mode, real-time display of POE port power;
- The power supply total is 120W;
- 3 year warranty.

RoHS **FC** **CE**

Introduction

The QT-G8PMPOES-2S-120W is a full gigabit L2+ managed PoE fiber switch. It has 8*10/100/1000Base-T RJ45 ports and 2*100/1000Base-X SFP fiber slot ports. Port 1-8 can support IEEE 802.3af/at standard PoE power supply. single port PoE power reaches 30W, and the maximum PoE output power is 130W(at-250W). As a PoE power supply device, it can automatically detect and recognize the power receiving equipment that meets the standard and supply power through the network cable. It can supply power to POE terminal equipment such as wireless AP, webcam, VoIP phone, building visual access control intercom through network cable, to meet the network environment that needs high-density PoE power supply, suitable for hotels, campuses, parks, supermarkets, scenic spots, Factory quarters and SMB small and medium-sized enterprises form a cost-effective network.

The QT-G8PMPOES-2S-120W has the L2+ full network management, support IPV4/IPV6 management, static route full line rate forwarding, security protection mechanism, complete ACL/QoS policy and rich VLAN functions, and is easy to manage and maintain. Supports multiple network redundancy protocols STP/RSTP/MSTP (<50ms) and (ITU-T G.8032) ERPS to improve link backup and network reliability. When one-way network fails, communication can be quickly restored to ensure important Uninterrupted communication for applications. According to the actual application requirements, you can configure multiple application services such as PoE power management, port traffic control, VLAN division, and SNMP through the Web network management mode.

TECHNICAL SPECIFICATION

Model	QT-G8PMPOES-2S-120W
Fixed Port	8*10/100/1000Base-T/TX PoE ports (Data/Power) 2*100/1000Base-X uplink SFP slot ports (Data) 1 * RS232 console port (115200, N,8,1)
Ethernet Port	10/100/1000Base-T(X), Auto-Detection, Full/half duplex MDI/MDI-X self-adaption
Twisted Pair Transmission	10BASE-T: Cat3,4,5 UTP (≤100 meter) 100BASE-TX: Cat5 or later UTP (≤100 meter) 1000BASE-T: Cat5e or later UTP (≤100 meter)
SFP Slot Port	Gigabit SFP optical fiber interface, default matching optical modules (optional order single-mode / multi-mode, single fiber / dual fiber optical module. LC)
Optical Cable	Multi-mode: 850nm 0 ~ 550M, single mode: 1310nm 0 ~ 40KM, 1550nm 0 ~ 120KM.
Network Management Type	L2+
Network Protocol	IEEE802.3 10BASE-T; IEEE802.3i 10Base-T; IEEE802.3u 100Base-TX; IEEE802.3ab 1000Base-T; IEEE802.3z 1000base-X; IEEE802.3x.
Forwarding Mode	Store and Forward
Switching Capacity	56Gbps
Forwarding Rate	14.88Mpps
MAC	8K
Buffer Memory	4.1M
Jumbo Frame	10K
LED Indicator	Power indicator: PWR (Green); Network indicator: 1-8(Link/Act)/ (Orange),9-10(Link/Act)/ (Green); POE indicator: PoE (Green) SYS: (Green)
Reset Switch	Yes, One-button factory reset

PoE Port	Port 1 to 8 IEEE802.3af/at @ POE	
PoE Management	Total power limit of PoE power supply PoE output power allocation, off& af &at PoE output priority configuration PoE working status Delay starts of power supply Scheduling of PoE operation and time	
Power Supply Pin	Defaul 1/2 (+), 3/6 (-)	
Max Power Per Port	30W; IEEE802.3af/at	
Total PWR / Input Voltage	120W (AC100-220V)	240W (AC100-220V)
Power Consumption	Standby:<4W; Full load:<120W	Standby:<4W; Full load:<240W
Power Supply	Built-in power supply, AC 100~220V 50-60Hz	Built-in power supply, AC 100~220V 50-60Hz
Operation TEMP / Humidity	-20~+55°C;5%~90% RH Non condensing	
Storage TEMP / Humidity	-40~+75°C;5%~95% RH Non condensing	
Dimension (L*W*H)	270*181*44.5mm	
Net /Gross Weight	<1.7kg / <2.2kg	
Installation	Desktop, 19-inch 1U cabinet	
Protection	IEC61000-4-2(ESD): ±8kV contact discharge, ±15kV air discharge IEC61000-4-5(Lightning protection/Surge): Power:CM±4kV/DM±2kV; Port: ±4kV	
Protection Level	IP30	
Certification	CCC; CE mark, commercial; CE/LVD EN60950; FCC Part 15 Class B; RoHS;	
Warranty	3 years, lifelong maintenance.	
Interface	IEEE802.3X (Full-duplex) Broadcast storm control based on port speed The speed limit of the message flow in the access port. The minimum particle size is 64Kbps. Port temperature protection setting Port green Ethernet Energy-saving setting	

Layer 3 Features	L2+ Network management IPV4/IPV6 management L3 soft routing forwarding, Static route, Default route @ 128 pcs, APR @ 1024 pcs
VLAN	4K VLAN based on port, IEEE802.1q VLAN based on the protocol VLAN based on MAC Voice VLAN, QinQ configuration Port configuration of Access, Trunk, Hybrid
Port Aggregation	LACP, Static aggregation Max 5 aggregation groups and 8 ports per group.
Spanning Tree	STP (IEEE802.1d), RSTP (IEEE802.1w), MSTP (IEEE802.1s)
Industrial Ring Network Protocol	G.8032 (ERPS), Recovery time less than 20ms 255 Ring at most, Max 1024 devices per ring.
Multicast	IGMP Snooping v1/v2, Max 1024 multicast groups, Fast log out MLD Snooping v1/v2, Multicast VLAN
Port Mirroring	Bidirectional data mirroring based on port
QoS	Diff-Serv QoS, Priority Mark/Remark 8*Output queues of each port 802.1p/DSCP priority mapping Queue Scheduling Algorithm (SP, WRR, SP+WRR) Flow-based Packet Filtering Flow-based Redirection Flow-based Rate Limiting
ACL	L2 to L4 packet filtering, matching first 80 bytes message. Provide ACL based on MAC, Destination MAC address, IP Source, Destination IP, IP Protocol Type, TCP/UDP Port, TCP/UDP Port Range, and VLAN, etc. Port-based Issuing ACL. ACL based on port and VLAN
Security	User hierarchical management and password protection

	SSH 2.0, SSL, Port isolation, ARP message speed limit Broadcast storm control, Backup for host datum IEEE802.1X & MAC address authentication Mac black holes, IP source protection AAA & RADIUS, MAC learning limit ARP inspection, Anti-DoS attack IP-MAC-VLAN-Port binding
DHCP	DHCP Client, DHCP Snooping, DHCP Server, DHCP Relay
Management	Console/AUX Modem/Telnet/SSH2.0 CLI Web Management (HTTPS) Download & Management on FTP, TFTP, Xmodem, SFTP, SNMP V1/V2C/V3 One-key recovery NTP, System work log, Ping Test Cable Diagnose, LLDP CPU instant utilization status view NMS - Smart Network Management System Platform (LLDP+SNMP)
System	Web browser: Mozilla Firefox 2.5 or higher, Google browser chrome V42 or higher, Microsoft Internet Explorer 10 or later; Category 5 Ethernet network cable TCP/IP, network adapter, and network operating system (such as Microsoft Windows, Linux, or Mac OS X) installed on each computer in a network

PACKING LIST

CONTENT	QTY	UNIT
10 Ports Full Giga PoE Switch with 2*Giga SFP (QT-G8PMPOES-2S-120W)	1	SET
User Guide	1	PC
Warranty Card	1	PC