






A
FRONT VIEW

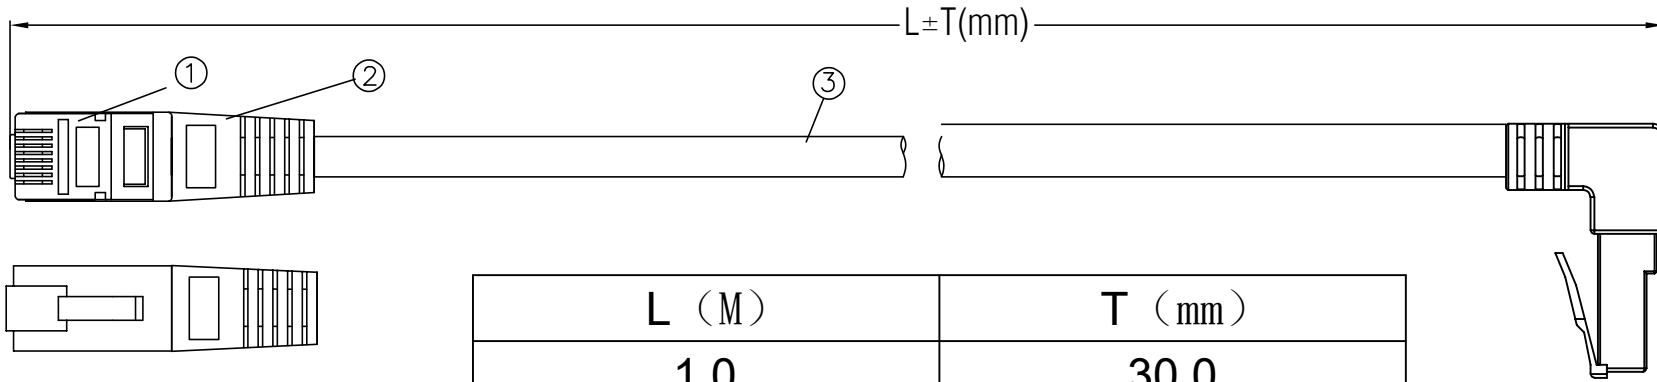


B
FRONT VIEW

L (M)	T (mm)
1.0	30.0
1.5	30.0
3.0	50.0

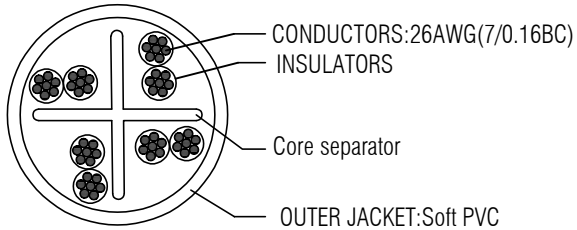

PIN OUT (T568B WIRING)

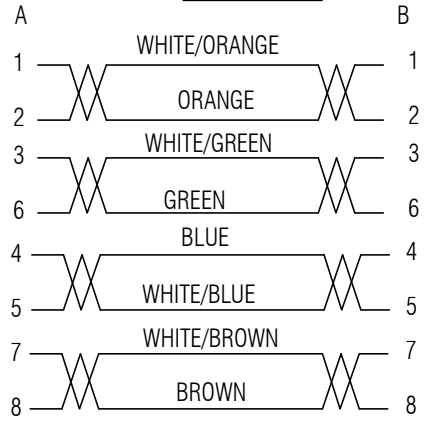

- 1.ELECTRICAL TEST:100% OPEN,SHORT & MISS WIRE TEST.
- 2.CONDUCTOR RESISTANCE : 2~10 OHMS MAX. INSULATOR RESISTANCE: 5M OHMS MIN.
- 3.HI-POT: DC 300V 0.01sec.
- 4.ALL MATERIAL FIT ROHS STANDARD(INCLUDE ALL PACKING OR OTHER MATERIAL).

CAT 6A 90 DEGREE TO STANDARD 180 DEGREE STOCK ETHERNET PATCH CABLE

DESCRIPTION:	CAT6 -UTP-26AWG-Soft PVC-90to180°	NO.	230515-1
P/N	C6A-SEPC-90-180-XX		PAGE: 1 OF 1
DRAWN BY:	Alex	UNIT:	mm
CHECKED BY:	Chris	DATE:	2023.05.15
APPVL BY:	ZHL	SCALE:	NONE
		TOLER:	±0.20
		REV:	1.0

NO.	SPECIFICATION STANDARD	QTY
①	RJ45 UNSHIELDED MALE CONNECTOR, LONG TYPE, PIN GOLD PLATED Fu".	2pcs
②	PVC 60P COLOR: BLACK	8g
③	CAT.6 UTP CABLE 26AWG(7/0.16)*4P, OD:Ø6.0MM, Soft PVC Jacket, COLOR:BLACK.	1pcs

REV	DESCRIPTION	DATE
1.0	DRAWING ISSUE	2023.05.15