

NOTES: UNLESS OTHERWISE SPECIFIED

MADE IN THE USA





PREMIUM CUSTOM UNIBOOT & PUSH-PULL TAB DUPLEX FIBER OPTIC PATCH CABLES BUILD SPECIFICATIONS

REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	T.D.	04/14/2024	T.C.
A.1	-	POLISH OPTIONS UPDATE	N.T.	04/15/2024	T.D.


1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. CABLES MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3.
3. CABLES ARE MANUFACTURED IN THE USA TO QUICKTREX® STANDARDS.
4. ALL FIBER WILL BE CORNING® GLASS.
5. ALL FIBER ENDS ARE 100% TESTED FOR OPTICAL PERFORMANCE AND INSPECTED WITH A FIBERSCOPE OF 400 POWER OR MORE FOR SURFACE DEFECTS INCLUDING CRACKING, PITTING, AND SCRATCHES ON THE GLASS SURFACE. ALL ENDS ARE TESTED UTILIZING A PROFESSIONAL GRADE LOSS TEST SET TO THE FOLLOWING STANDARDS:
MULTIMODE: 62.5/125 & 50/125: IL MAX 0.2DB, MIN -0.1DB
SINGLEMODE: IL MAX 0.2dB MIN -0.1dB ORL (OPTICAL RETURN LOSS)
 -55dB STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.
6. JACKET COLOR: OM4 (STANDARD AQUA), AND SINGLEMODE (STANDARD YELLOW).
7. ALL MULTIMODE CABLES WILL INCLUDE A STANDARD PC POLISH. SINGLEMODE CABLES WILL HAVE A STANDARD UPC (ULTRA PHYSICAL CONTACT) POLISH.
8. ONE WRAP AROUND LABEL IS ATTACHED TO EACH END OF THE CABLE FOR IDENTIFICATION. THE LABEL WILL INCLUDE THE QUICKTREX PART # AND AN INDIVIDUAL SERIAL NUMBER.
9. A TRANSITIONAL BREAKOUT WILL BE USED ON ALL CABLES WITH STANDARD LC CONNECTORS. THE BREAKOUT INCLUDES GLUE SET AND HEAT SHRINK TUBING.
10. EACH CABLE WILL BE INDIVIDUALLY SEALED IN A BAG WITH TEST RESULTS INCLUDED. BAG WILL ALSO INCLUDE PART NUMBER # AND SERIAL #.

ASSEMBLY LENGTH 6 INCHES TO 30 METERS

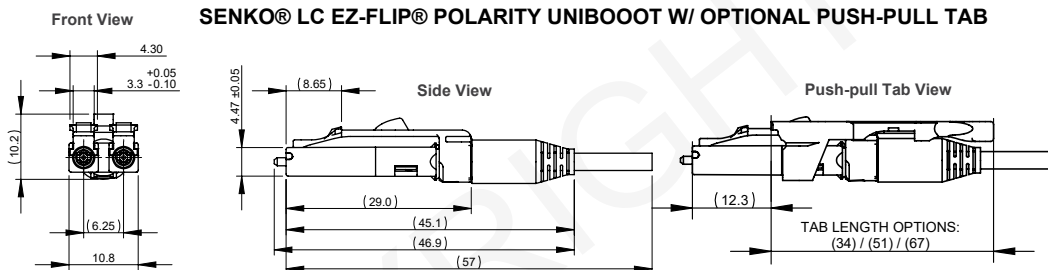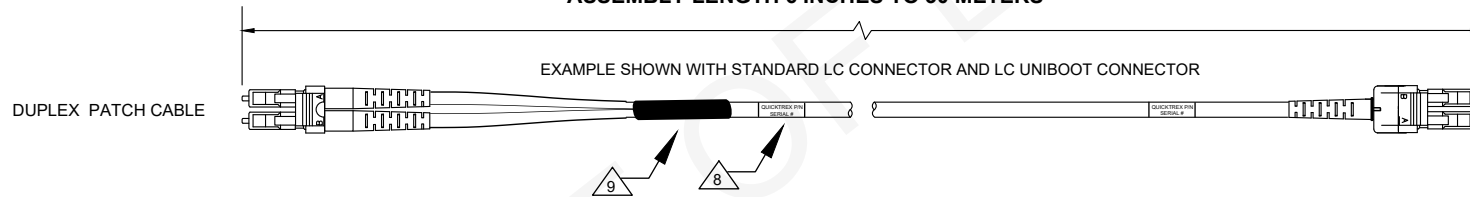

Note: 1. All dimensions are in mm 2. Specifications subject to change without notice

CROSS SECTION - NOT TO SCALE

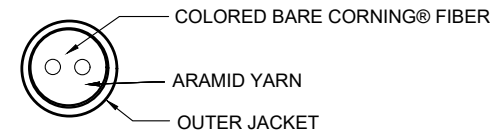

QUICKTREX CUSTOM OPTIONS		QUICKTREX STANDARD SPECIFICATIONS		MADE IN THE USA TAA COMPLIANT ISO9001 CERTIFIED MANUFACTURING			
FIBER MODE: MULTIMODE OM4 & SINGLEMODE		CONNECTOR POLISH: PC-MM, UPC-SM		DRAWN BY:	T.DAMIANO	04/14/2023	PURCHASE AT LANSHACK.COM PHONE: 888-568-1230 EMAIL: SALES@LANSHACK.COM
LENGTH: 6" - 30 METERS		CABLE JACKET TYPES: INDOOR PLENUM (OFNP) - PVC		APVD BY:	A. DAMIANO	04/15/2023	
CONNECTORS: SENKO® LC EZ-FLIP® POLARITY UNIBOOT SENKO® LC EZ-FLIP® POLARITY UNIBOOT w/ 34mm PUSH-PULL TAB SENKO® LC EZ-FLIP® POLARITY UNIBOOT w/ 51mm PUSH-PULL TAB SENKO® LC EZ-FLIP® POLARITY UNIBOOT w/ 67mm PUSH-PULL TAB STANDARD DUPLX LC		CABLE DIAMETER: 2.0 mm		DIMENSIONS: METRIC [IMPERIAL]		TITLE: CUSTOM UNIBOOT & PUSH-PULL TAB DUPLX FIBER OPTIC PATCH CABLES	
		POLARITY: CROSS-OVER (A-B, B-A) STRAIGHT THROUGH (A-A,B-B) AVAILABLE UPON REQUEST		PROPRIETARY AND CONFIDENTIAL THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF LANSHACK.COM. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.		SIZE A	SKU: QT-CFOPC-OM4-SEZF-XX-XXXX-XXXX
						SCALE: NOT TO SCALE	REV D SHEET 1 OF 1