


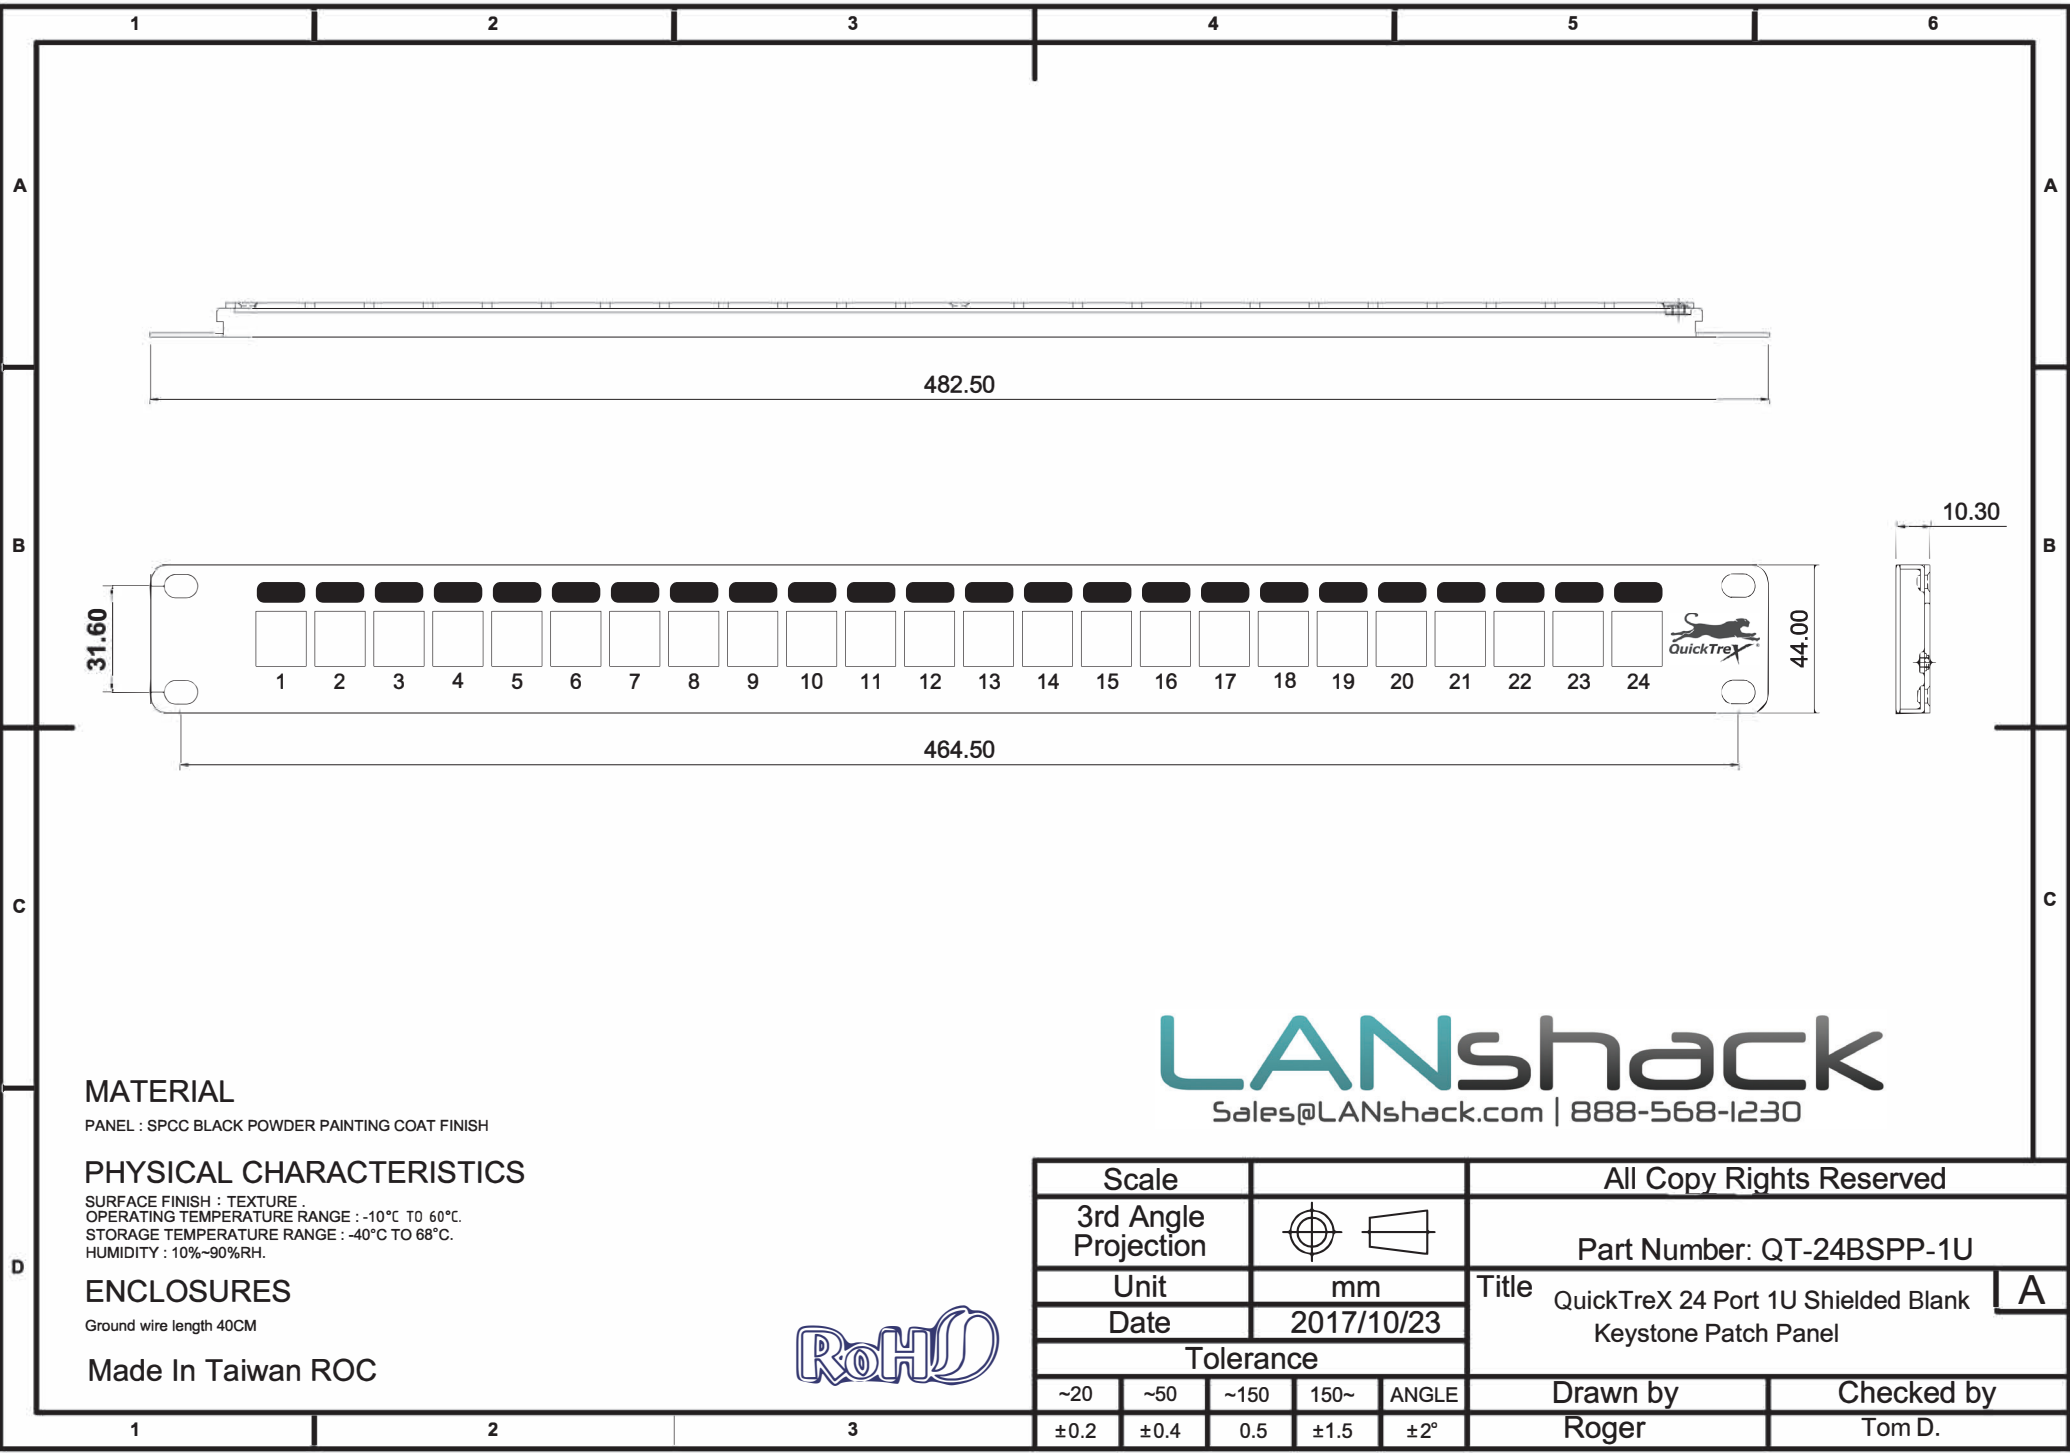

MATERIAL

PANEL : SPCC BLACK POWDER PAINTING COAT FINISH

PHYSICAL CHARACTERISTICS

SURFACE FINISH : TEXTURE .
OPERATING TEMPERATURE RANGE : -10°C TO 60°C.
STORAGE TEMPERATURE RANGE : -40°C TO 68°C.
HUMIDITY : 10%~90%RH.

ENCLOSURES

Ground wire length 40CM

Made In Taiwan ROC



LANshack

Sales@LANshack.com | 888-568-1230

Scale					All Copy Rights Reserved			
3rd Angle Projection					Part Number: QT-24BSPP-1U Title QuickTreX 24 Port 1U Shielded Blank Keystone Patch Panel			
Unit		mm						
Date		2017/10/23						
Tolerance								
~20	~50	~150	150~	ANGLE	Drawn by		Checked by	
±0.2	±0.4	0.5	±1.5	±2°	Roger		Tom D.	