
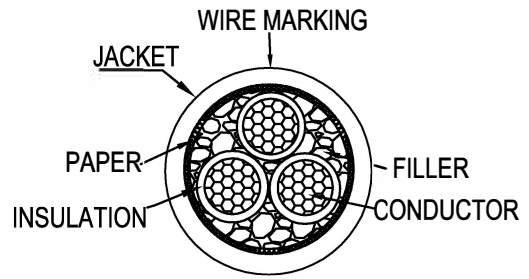


NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description

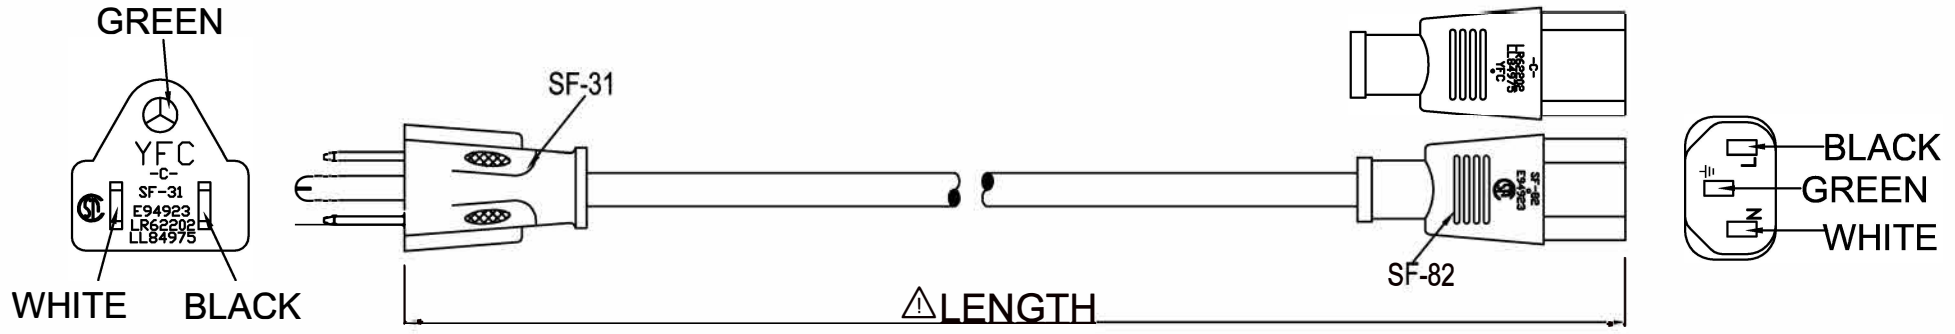

<b>WIRE MARKING:</b> (Hollow)		(UL) E135710-F3 SVT 3X18AWG 60°C 300V VW-1 CSA LL95737 SVT 3X0.824mm <sup>2</sup> (18AWG) 60°C 300V FT2 YFC-BONEAGLE					
Conductor		Insulation			Jacket		Overall diameter
AWG	Resistance maximum (≤)	Min.Thick	Diameter	Length of Lay	Min.Thick	AVG.Thick	
18# (41/0.154)	at20°C≤22.4ohms/km at25°C≤22.8ohms/km	0.33mm	2.0±0.1mm	44↓mm	0.61mm	0.76mm	6.3±0.1mm
<b>(NOTE: IF THE CONDUCTORS O.D IS GO BEYOND THE SCOPE, THE RESISTANCE OF CONDUCTOR IS STANDARD THEN)</b>							

**ELECTRIC TESTING:**

- 100% OPEN & SHORT TESTING .
- VOLTAGE RATING:AC ≥1500V/S
- PLUG(SF-31) RATED POWER:  
125V 10A UL-E94923 CSA-LR62202
- PLUG(SF-82) RATED POWER:  
125V 10A UL-E94923 CSA-LR62202
- WIRE: SVT 18/3 RATED  
POWER:300V 10A UL-E135710 CSA-LL95737
- COLOR:BLACK

# LANshack

Sales@LANshack.com | 888-568-1230

DRAWN BY: DHY	DATE: 2012/04/18	DESCRIPTION: Black Power Cord with NEMA 5-15P to IEC C-13 Connectors and 18/3 AWG Conductors (AC125V / 10A / 1250W) - RoHS Compliant and UL/CSA Approved
CHECKED BY: wuxiao	SHEET 1 of 1	ITEM NO. LSBL-PC-5-15-163-XX
APPROVED BY	SCALE 1:1	REV. 00 UNIT: mm

