

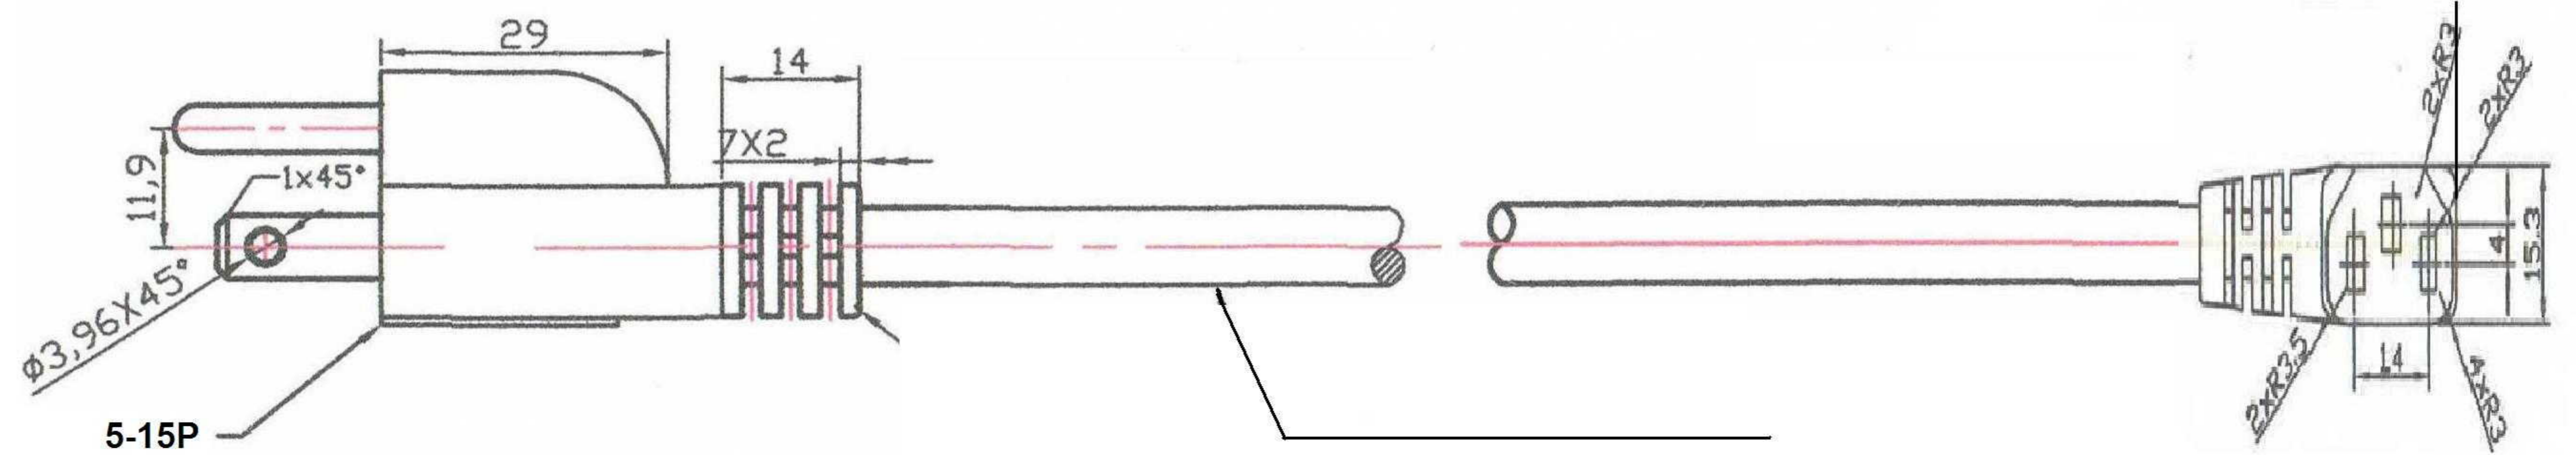


NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description
	2016-02-18	Zhang	Add cable insulated specification

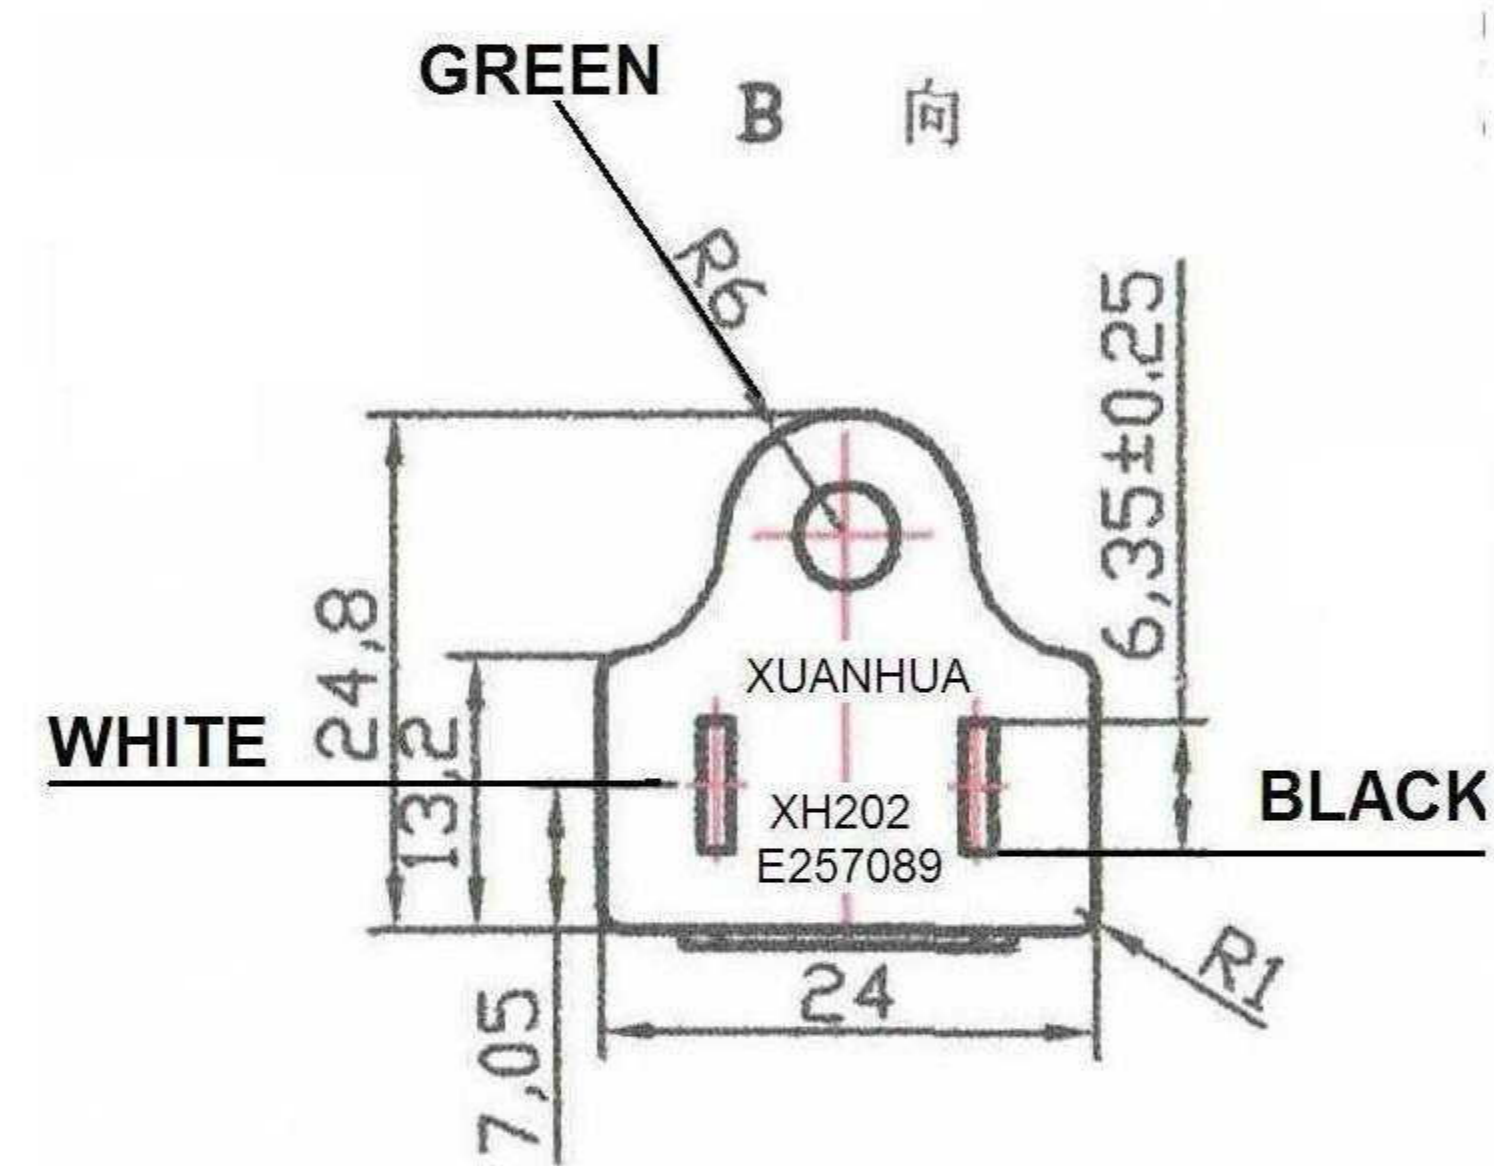

UL c(UL) SVT 3C 18AWG(0.824mm²) 60C VW-1
300V E313867 100030-765 FT1 NINGBO XUANHUA

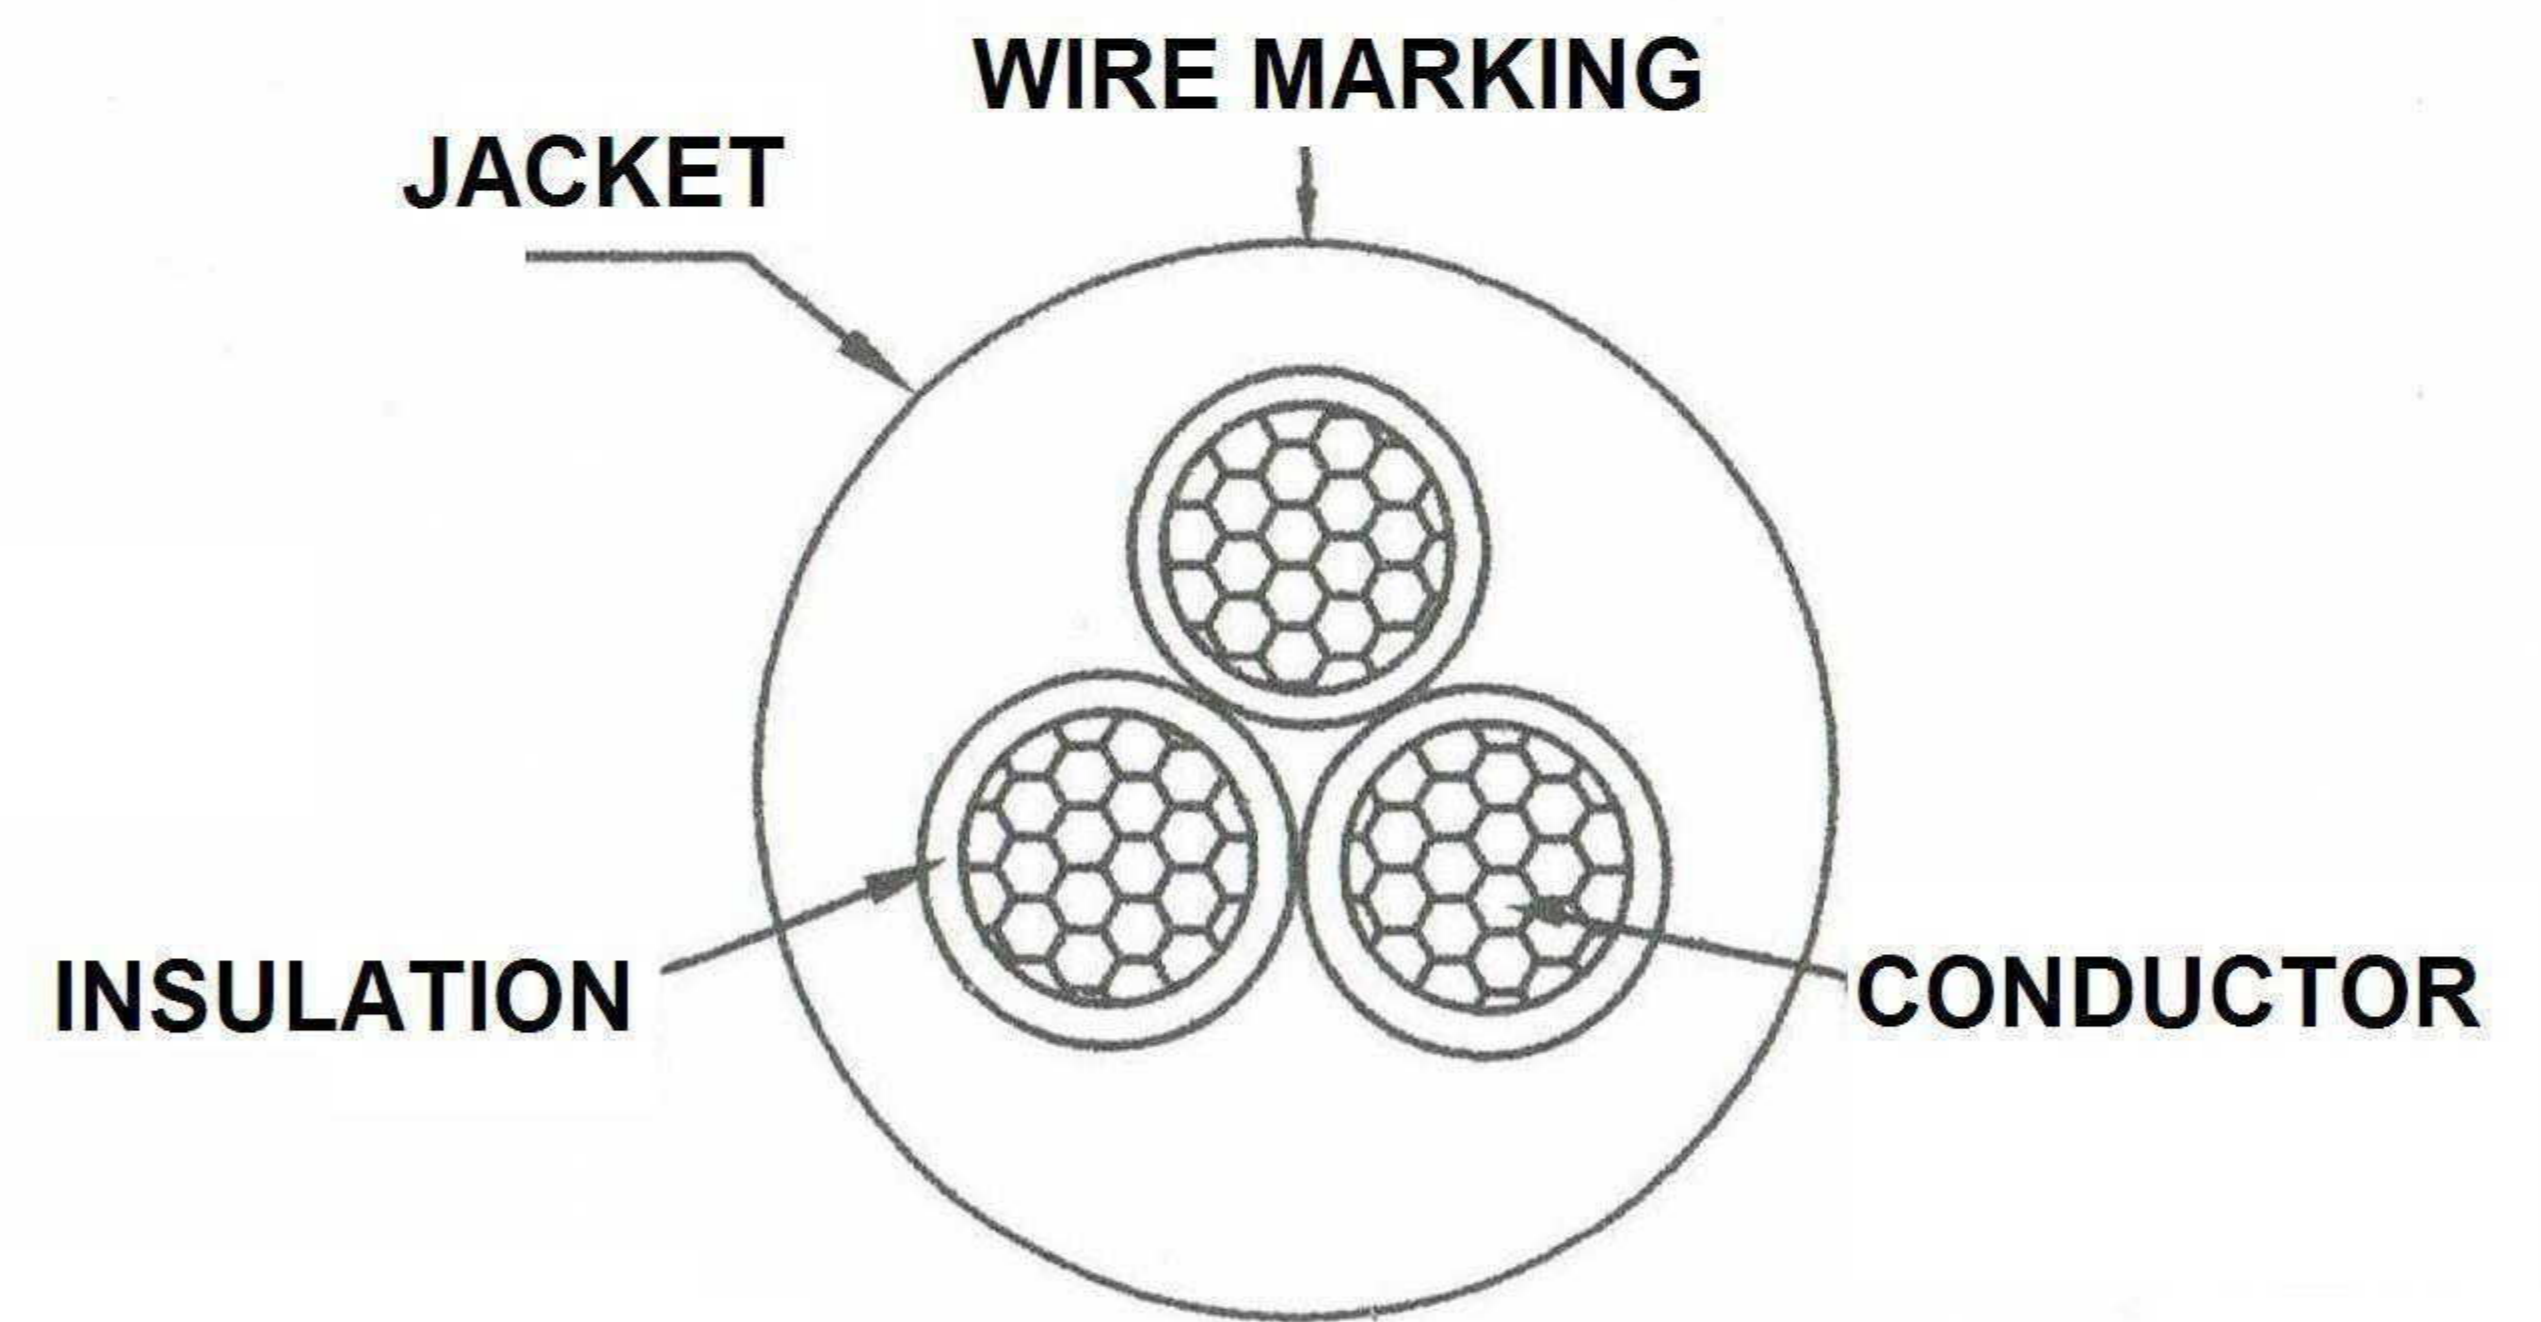

CONDUCTOR	INSULATION		JACKET		OVERALL DIA.
	AWG	Min Thick	Diameter	Min Thick	
18AWG 41/0.16	0.33	2.0+0.1	0.61mm	0.76mm	6.2+0.15mm

NOTE: If the conductors O.D is go beyond the scope, the resistance of conductor is standard then.

LANshack

Sales@LANshack.com | 888-568-1230

DRAWN BY WANG	DATE: 2016-02-18	DESCRIPTION: Black Power Cord with NEMA 5-15P to IEC C-13 Connectors and 18/3 AWG Conductors (AC125V / 10A / 1250W) - Right Angle
CHECKED BY ZHANG	SHEET 1 of 1	ITEM NO. LSBL-PC-5-15-183-RA-1
APPROVED BY	SCALE 1:1	REV. 00 UNIT: mm

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
③				
②				
①				