


NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description
	2024.06.26	FYQ	CHANGE LOGO

6FT ± 2.5CM

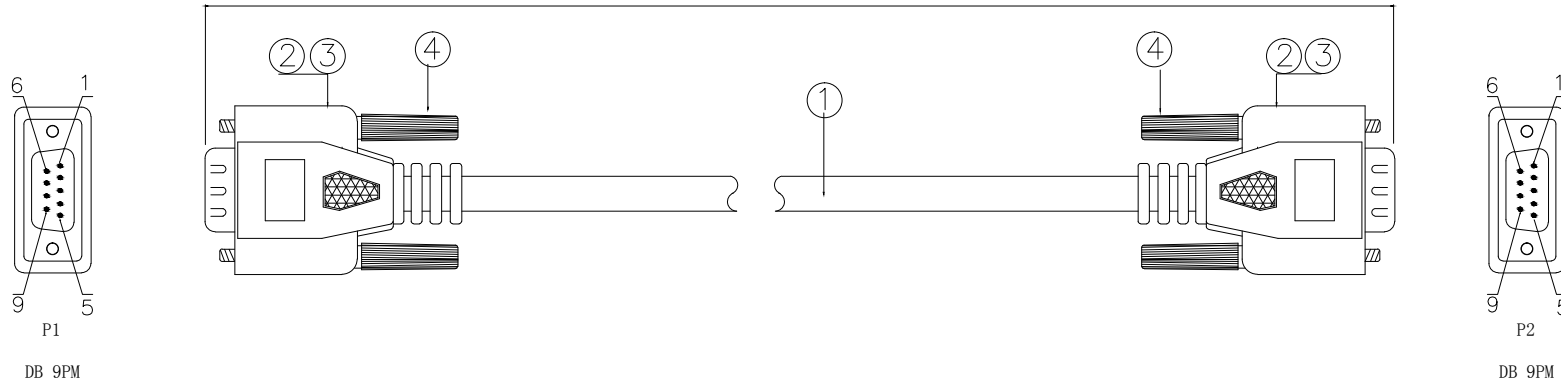


Wire point

P1		P2
1	—————	1
2	—————	2
3	—————	3
4	—————	4
5	—————	5
6	—————	6
7	—————	7
8	—————	8
9	—————	9

shell ——— D ——— shell

Wire Details

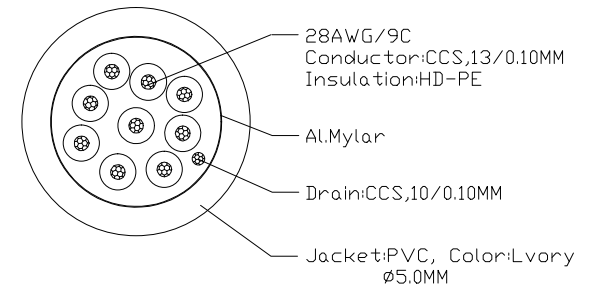

Technical Requirements

1.Electrical Characteristics:

1.1.cable must pass electrical testing, no short circuit, open circuit, indirect sexual contact, insufficient insulation, dislocation, and other electrical contact resistance of adverse circumstances

1.2 Electrical Test Conditions

Conductor Resistance:10 Ω

2.Appearance requirements:

2.1 No shot short.shrink. flow liner

2.2 Wire surface printing clear, smooth appearance, can not have scratches and obvious color

2.3 Terminals can not have oxidation or electrodeposited coating fall off

3.Packing: Circle around a single package.

1).Material List :

④	SCREW	2.3*49MM IVORY color screw stem	4	PCS
③	Outer Moalding	45P PVC IVORY color plugs	NA	KG
②	Connector	DB 9PM two rows of blue iron shell plating nickel	2	PCS
①	Wire	28#(13/0.10CCS)*9C+D(10/0.10CCS)+AL+PVC, Lvory, OD:5.0MM	6	ft
NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT

**LANshack**  
Sales@LANshack.com | 888-568-1230

DRAWN BY	DATE: 2024.06.26	DESCRIPTION: 6Ft DB9 Male to Male Serial Cable Fully Shielded With Molded Connectors		
CHECKED BY	SHEET 1 of 1	ITEM NO. LSBL-MM-9-S-6		
APPROVED BY	SCALE 1:1	REV. 00	UNIT: mm	