
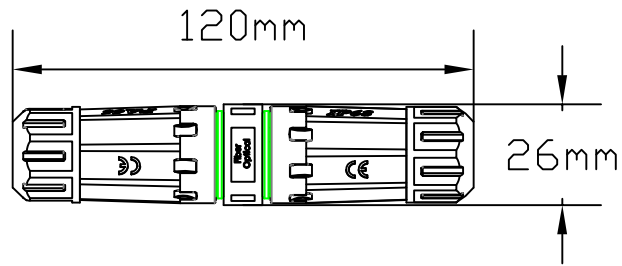


M20
IP68

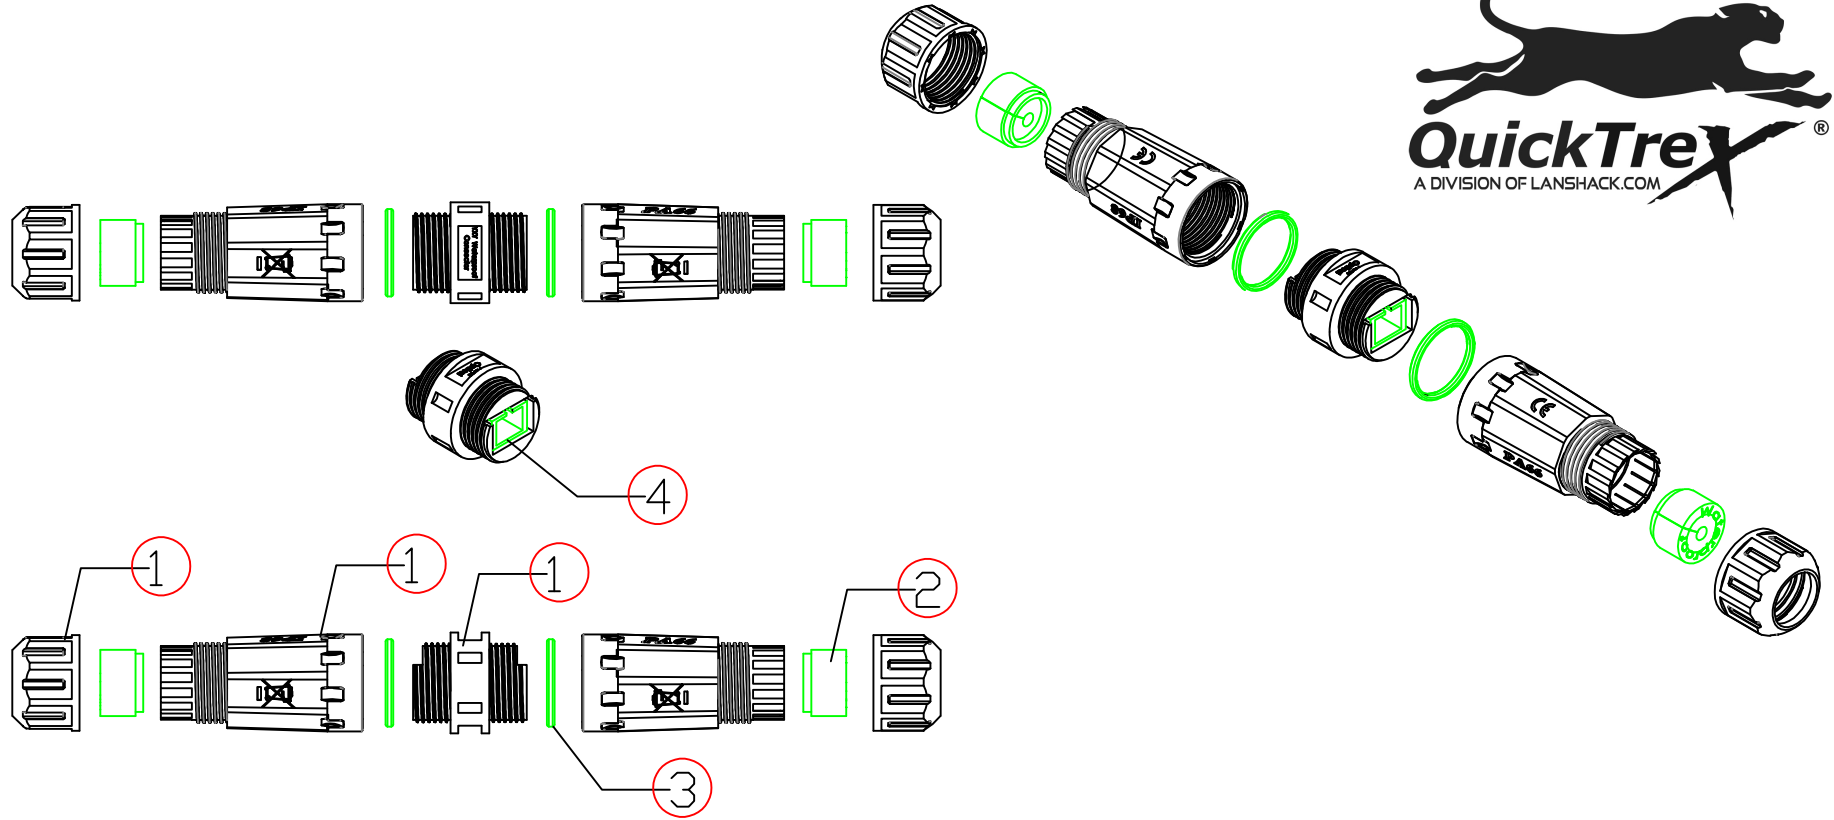

P1 — P2
1 — 1

④	Empty	1pcs
③	O-type silicone ring	4pcs
②	Circular rubber ring	2pcs
①	NyLon PA66	

A	FRIST EDITION	ZP	2017/3/30
REV.	DESCRIPTION	C.N.	DATE
		QuickTrex® Premium Outdoor Harsh Environment Waterproof IP68 Rated In-Line Protective Connector / Coupling Cover Shell - Compatible w/ 1.5 - 4.5 mm Cable OD	
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE: ±1.0°		P/N QT-OHE-IP68-INL-PCCCS-1545	
DIMENSIONS	TOLERANCE	CHKD.	T. D
0.00 TO 30.00mm	±0.10mm	DR.	CONF.
30.01 TO 80.00mm	±0.13mm		APPD.
80.01 TO 150.00mm	±0.15mm		
150.01mm ↑	±0.20mm		
MATERIAL	MATERIAL	SCALE	SHEET
FINISH	FINISH		1 / 1
		UNIT	MM
		SIZE	A4
		REV.	A