NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description
001	2022.4.16	LWZ	Point marked

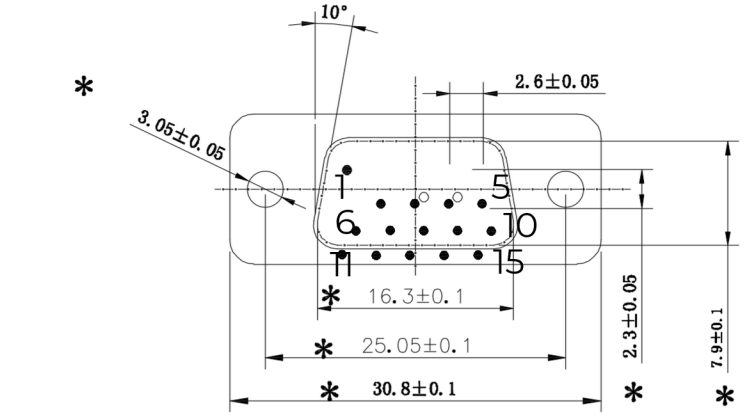

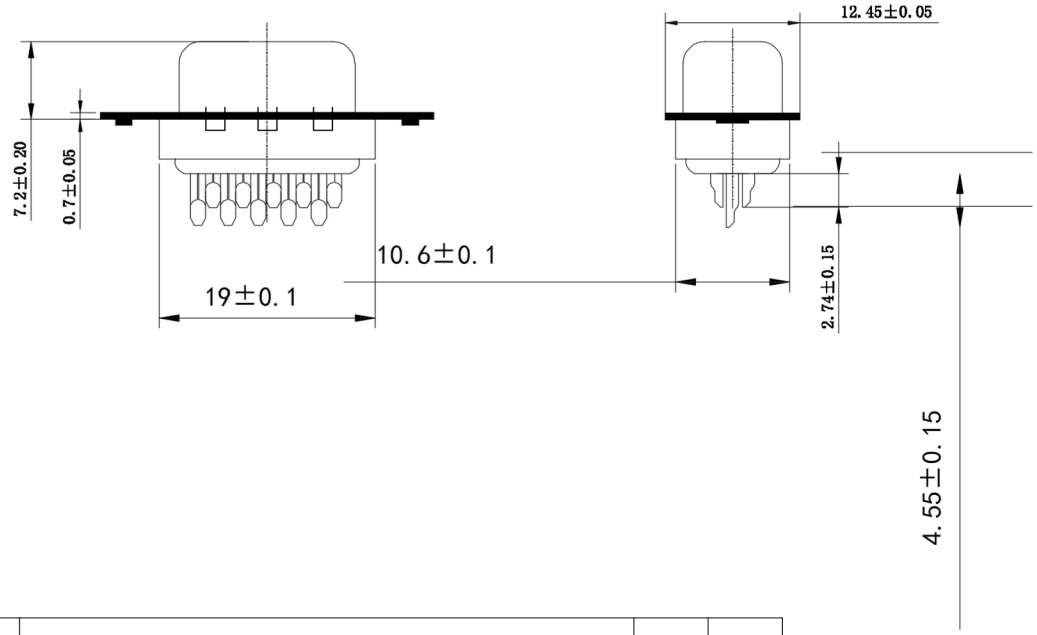

ELECTRICAL CHARACTERISTICS:
CONTACT CURRENT RATING : 1 AMP.
DIELECTRIC WITHSTANDING VOLTAGE : AC 500V R.M.S.
INSULATION RESISTANCE :
500 MEGOHMS MINIMUM AT DC 500V.
CONTACT RESISTANCE : 30 MILLIOHM MAXIMUM.
OPERATING TEMPERATURE : −55°C TO+105°C.

MECHANICAL CHARACTERISTICS:
CONTACT INSERTION FORCE :6.0MAX .
CONTACT SEPARATION FORCE :4.0MIN.

MATERIALS:
CONTACT: BRONZE.
INSULATOR: P.B.T.UL 94V−O BLACK.
SHELL: COLD ROLLED STEEL.

FINISHES:
CONTACTS :GOLD PLATED 30μ".

* QC for control of key sizes

NO	PAETNAME	SPECIFICATION DESCRIPTION	QT'Y	UNIT
①				
②				
③				

LANshack
Sales@LANshack.com | 888-568-1230

DRAWN BY	DATE: 2017.10.24	DESCRIPTION: DB15 HD Male Solder Cup Connector 15 Pin for Custom Pinout
CHECKED BY	SHEET 1 of 1	ITEM NO. LSBL-CON-D15-M-SC
APPROVED BY	SCALE 1:1	REV. 00 / UNIT: mm