
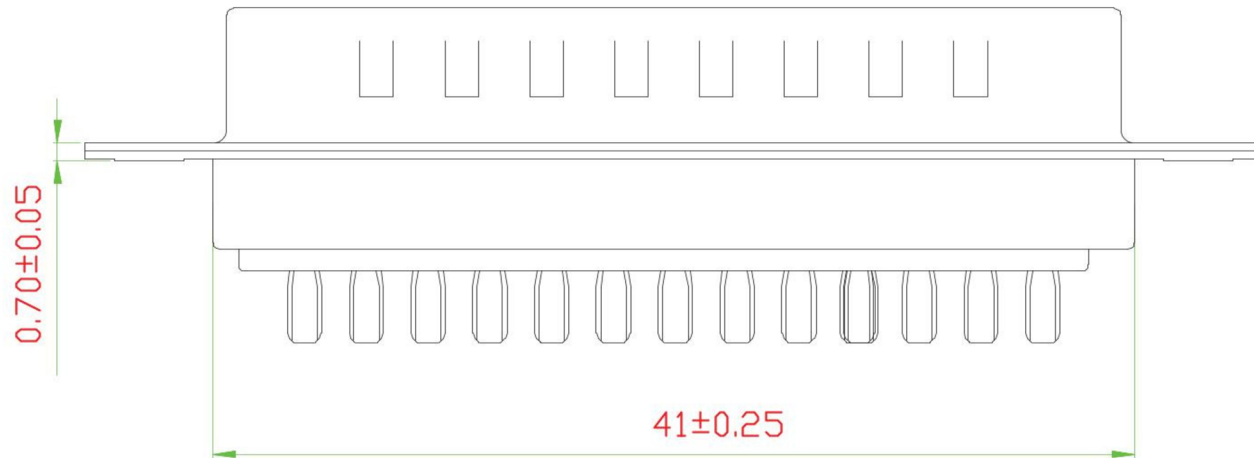
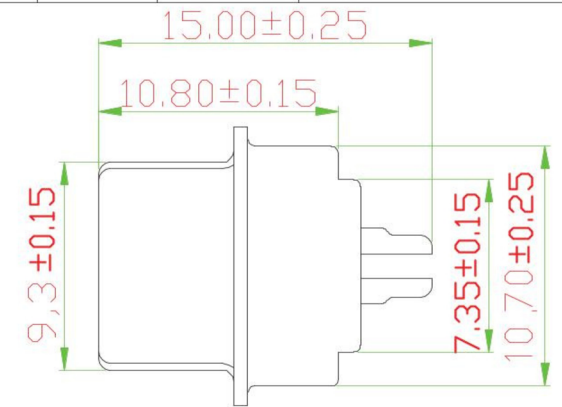


NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description

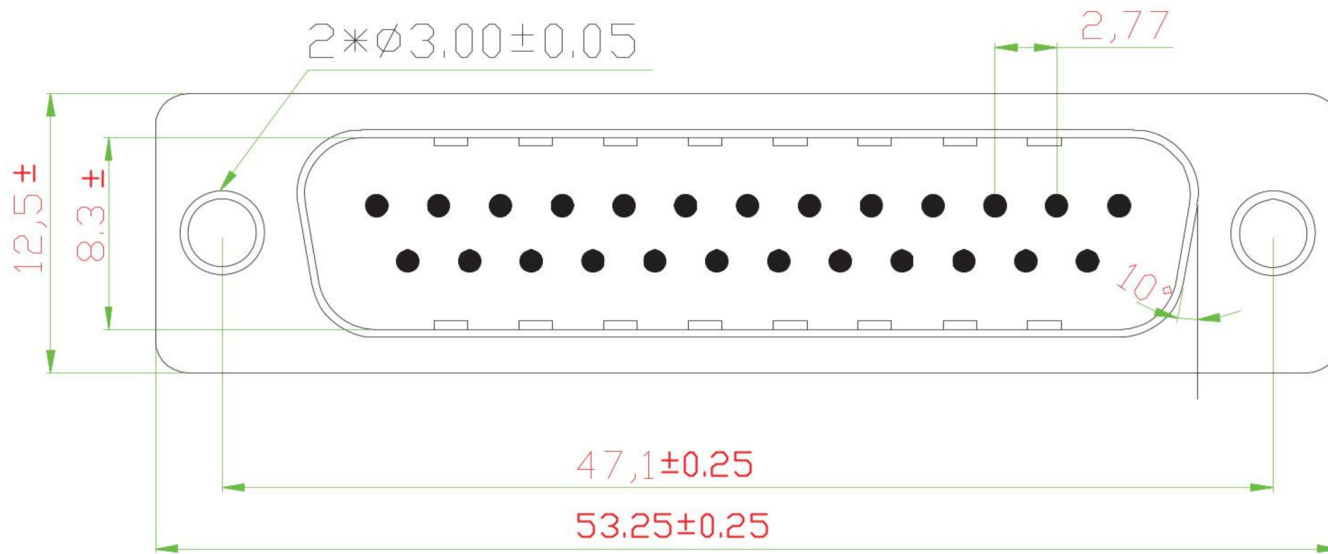

Remark:

1. Contacts: gold flash plated bronze contacts segment remaining pure tin plating
2. Nickel-plated steel shell before the shell after shell steel tin
3. Appearance requirements:
No loose plastic parts. Breakage
Metal parts without deformation. No damage, coating well.
No black. Corrosion phenomenon
Terminal no offset. Pins height the same, no skew phenomenon.
4. Salt Requirements:
Copper plated:8HourNSS
Copper (steel) Nickel:8HourNSS
5. Products using plastic boxes packed per box 50PCS, can not appear pin,
Housing without damage; mixing; sprawl. Packing Packed in a dry, moisture.
Dust and mildew in the box. Storage period not exceeding two years from the date of manufacture.

LANshack
Sales@LANshack.com | 888-568-1230

DRAWN BY	DATE:	DESCRIPTION: DB25 Male Solder Cup Connector 25 Pin for Custom Pinout	
CHECKED BY	SHEET 1 of 1	ITEM NO. LSBL-CON-D25-M-SC	
APPROVED BY	SCALE 1:1	REV. 00	UNIT: mm

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
③				
②				
①				