

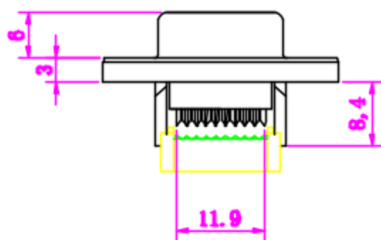
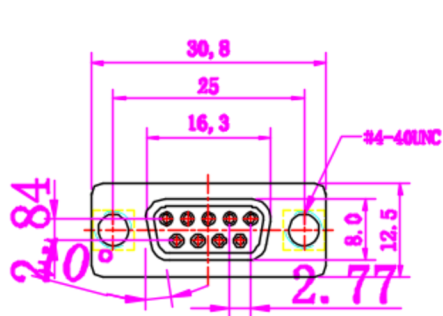
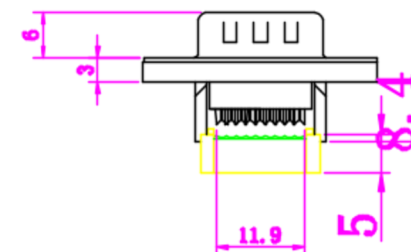
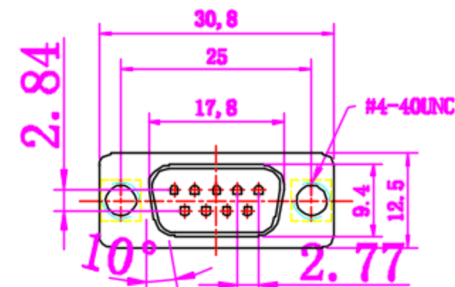


| REVISION INFORMATION | | | |
|----------------------|-----------|-------------|-------------------|
| Rev. | Rev. Date | Modified By | Brief Description |
| | | | |

FEMALE



MALE

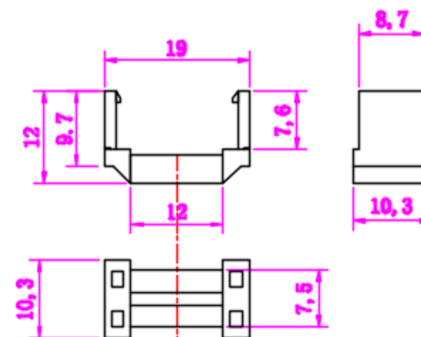

Specifications:

- Contact Resistance: 30m Ω max. at DC 100mA
- Insulator Resistance: 1000m Ω min. at DC 500v
- Current Rating: 1AMP

Dielectric Withstanding

- Voltage: AC 500V For 1 minute
- Operating Temperature: -55° C +105° C
- Contact: Male Brass or Female Phosphor Bronze
- Housing: PBT & 30% Glass Fiber (UL 94V-0)

LANshack

Sales@LANshack.com | 888-568-1230

| | | |
|--------------------|--------------------------|---|
| DRAWN BY | DATE: 2012/1/4 | DESCRIPTION: DB9 Female IDC Connector with Metal Shell 9 Pin |
| CHECKED BY | SHEET 1 of 1 | ITEM NO. LSBL-CON-DB9-F-MS |
| APPROVED BY | SCALE 1:1 | REV. 00 UNIT: mm |