



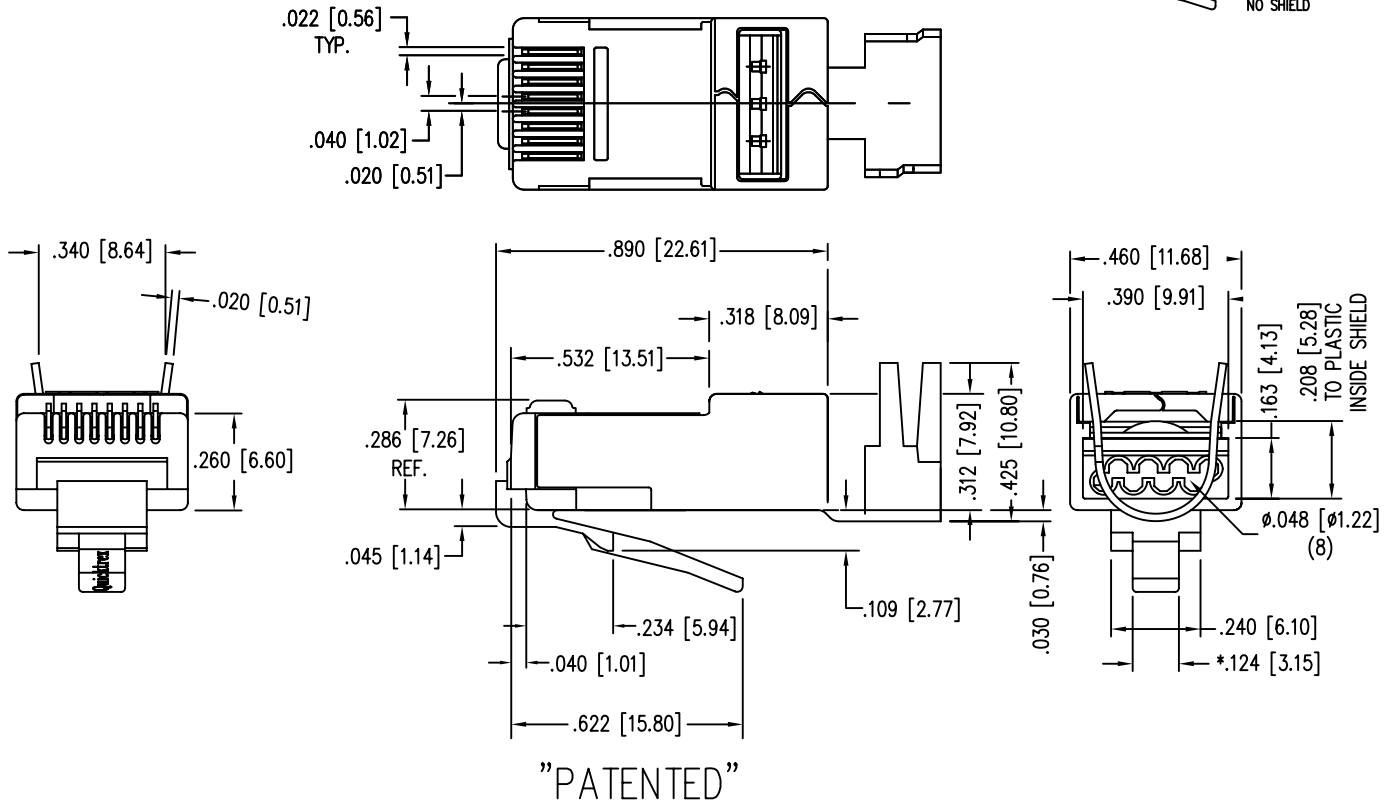

## QuickTreX™ Category 6A Shielded Modular Plugs w/ Loadbar - Bag of 50

**PART # QT-LS6AS-P50**

- \* EIGHT CONDUCTOR MODULAR PLUG
- \* FOR HIGH SPEED APPLICATION
- \* FOR CONDUCTORS WITH AN O.D. RANGE OF .044 – .048
- \* USE FOR SOLID OR STRANDED CONDUCTORS
- \* PRODUCT REQUIRES A CONDUCTIVE LOAD BAR (PT. No. LB006)
- \* SHIELDED VERSION (SPECIAL HEIGHT) MODULAR PLUG
- \* FOR CABLE DIAMETERS UP TO .310

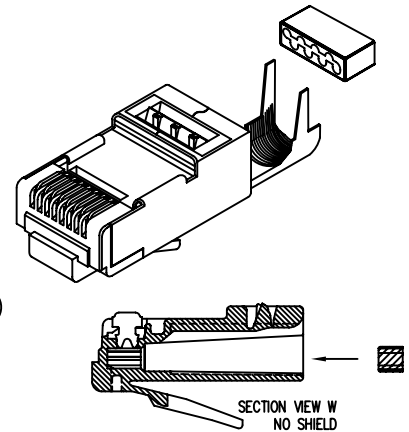

### SPECIFICATIONS :

#### PERFORMANCE:

EXCEEDS CATEGORY 5 EIA/TIA 2840, ANNEX B SPECIFICATION  
PERFORMANCE TUNED TO CABLES MEETING CATEGORY 6 SPECIFICATIONS.

#### CONTACT MATERIAL:

PHOSPHOR BRONZE – .012

#### CONTACT PLATING:

50 MICRO-INCH : OTHER PLATING OPTIONS AVAILABLE  
SELECTIVE 24 CARAT HARD GOLD PLATE IN CONTACT AREA  
OVER 100 MICRO-INCH MINIMUM NICKEL PLATE  
PER CURRENT SELECTIVE GOLD PLATING REQUIREMENTS.

#### SHIELD MATERIAL:

CDA-260 1/4 HARD BRASS .012 EXCEPT WHERE NOTED .020

#### SHIELD PLATING:

100% TIN 100-150 MICRO INCH TIN PLATED

#### PLUG MATERIAL:

POLYCARBONATE

#### PLUG TOLERANCES AND DIMENSIONS:

COMPLIES WITH F.C.C REQUIREMENTS

#### FLAME AUTO EXTINGUISH

94-V0 – File# E188111

#### OPERATION TEMPERATURE:

–40°C TO +70°C

#### INSERTION/EXTRACTION LIFE:

1000 CYCLES

#### CONTACT RESISTANCE:

10 MILLOHMS MAX.

#### CURRENT/VOLTAGE:

30 VAC/42 VDC AT 1.5 AMPS

(RoHS COMPLIANT)

Purchase at

**LANshack**

Sales@LANshack.com | 888-568-1230