



PRODUCT SPECIFICATIONS

**CONVERGENT
CONNECTIVITY
TECHNOLOGY**

CAT6ANP4

Description:


23AWG Non-Plenum, unshielded four twisted pairs,
Category 6A Horizontal Cable Tested to 500 MHz.

Ratings/Approvals:

NEC Article 800, ANSI/TIA/EIA 568C.2 Category 6A,
11801:2002 Category 6A, UL 1666:CMR Rating, C(ETL)US, RoHS Compliant

Applications:

Supports all category 6A applications including Ethernet 10 Gigabit, 100BASETX,
100BaseVG ANYLAN, 155ATM, 622ATM, NTSC/PAL Component or Composite
Video, AES/EBU Digital Audio, AES51, RS-422.

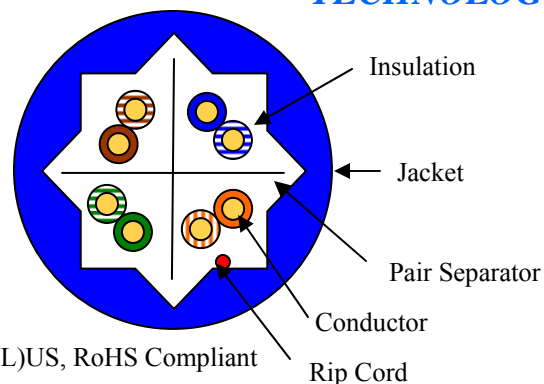

CONSTRUCTION

Conductor:	23 AWG Solid Bare Copper
Number of Conductors or Pairs:	4 Pair
Jacket Material:	Polyvinyl Chloride
Nominal Overall Cable Diameter:	0.340 in.
Approximate Cable Weight:	48 lb/1,000 ft.

ELECTRICAL & PHYSICAL PROPERTIES

Temperature Rating:	Installation: 0°C to 50°C Operation: -2°C to 60°C
Velocity of Propagation:	70%
Mutual Capacitance:	14 pF/ft Nominal
Capacitance Unbalance:	330 pF/ft maximum
Maximum Conductor D.C.R.:	28.6Ω/1,000 ft
Maximum D.C.R. Unbalance:	3%
Maximum Delay Skew:	45ns/100m
Characteristic Impedance:	From 0.772 MHz - 100 MHz 100 ± 15% From 100 MHz - 200 MHz 100 ± 22% From 200 MHz - 500 MHz 100 ± 32%
Minimum bend radius:	1.250 in.
Insulation Colors:	Blue paired with White/Blue Orange paired with White/Orange Brown paired with White/Brown Green paired with White/Green



Issue Date: April '10 Revision: 2

THE STRONGEST LINK IN YOUR SUPPLY CHAIN

Page 1 of 2



The information provided herein is, to the best of our knowledge, true and accurate. Since conditions of use are beyond our control, all information presented is without guarantee or responsibility on our part. We disclaim all liability in connection with the use of information contained herein or otherwise.



PRODUCT SPECIFICATIONS

**CONVERGENT
CONNECTIVITY
TECHNOLOGY**

CAT6ANP4

Electrical Characteristics:

Frequency MHz	Return Loss	Insertion Loss	NEXT	PS-NEXT	ACRF	PS-ACRF	Prop. Delay	Alien Crosstalk	
	(dB/100m)	(dB/100m)	(dB/100m)	(dB/100m)	(dB/100m)	(dB/100m)	(dB/100m)	PS ANEXT	PS AACRF
	Minimum	Maximum	Minimum	Minimum	Minimum	Minimum	Maximum	Minimum	Minimum
1	20.0	2.0	74.3	72.3	67.8	64.8	570.0	67.0	67.0
4	23.0	3.8	65.3	63.3	52.8	52.8	552.0	67.0	66.2
8	24.5	5.3	60.8	58.8	46.7	46.7	546.7	67.0	60.1
10	25.0	5.9	59.3	57.3	44.8	44.8	545.4	67.0	58.2
16	25.0	7.4	56.2	54.2	40.7	40.7	543.0	67.0	54.1
20	25.0	8.3	54.8	52.8	38.8	38.8	542.0	67.0	52.2
25	24.3	9.3	53.3	51.3	36.8	36.8	541.2	67.0	50.2
31.25	23.6	10.5	51.9	49.9	34.9	34.9	540.4	67.0	48.3
62.5	21.5	14.9	57.4	45.4	28.9	28.9	538.6	65.6	42.3
100	20.1	19.1	44.3	42.3	24.8	24.8	537.6	62.5	38.2
155	18.8	24.0	41.4	39.4	21.0	21.0	536.9	59.6	34.4
200	18.0	27.5	39.8	37.8	18.8	18.8	536.5	58.0	32.2
250	17.3	31.0	38.3	36.3	16.8	16.8	536.3	56.5	30.2
300	16.8	34.2	37.1	35.1	15.3	15.3	536.1	55.3	28.7
350	16.3	37.2	36.1	34.1	13.9	13.9	535.9	54.3	27.3
400	15.9	40.0	35.3	33.3	12.8	12.8	535.8	53.5	26.2
500	15.2	45.2	33.8	31.8	10.8	10.8	535.6	52.0	24.2

Purchase at

LANshack

Sales@LANshack.com | 888-568-1230



Issue Date: April '10 Revision: 2

THE STRONGEST LINK IN YOUR SUPPLY CHAIN

