



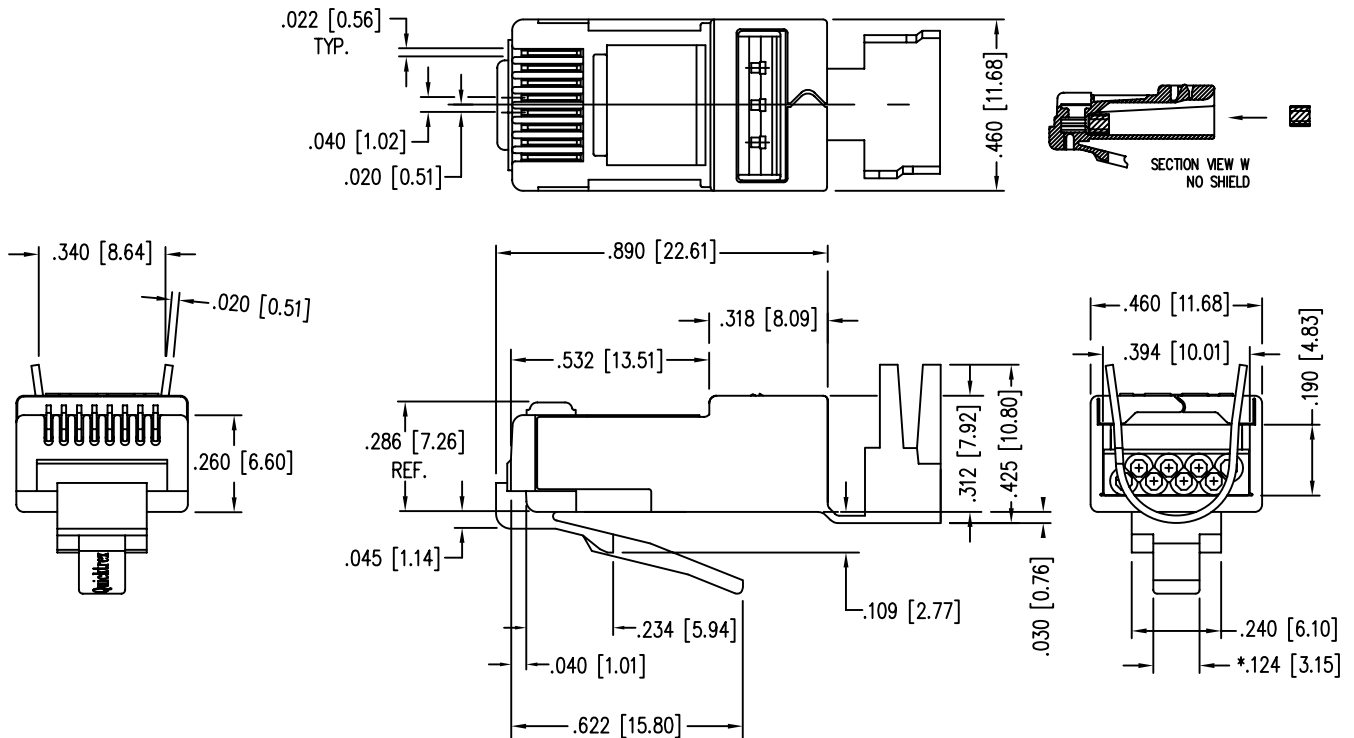

## QuickTreX® Category 6E (& 5E), Shielded Modular Plugs w/ Loadbar - Bag of 10

**PART # QT-LS6S-P10**

- \* EIGHT CONDUCTOR MODULAR PLUG
- \* FOR HIGH SPEED APPLICATION
- \* FOR CONDUCTORS WITH AN O.D. RANGE OF .037/.042
- \* USE FOR SOLID OR STRANDED CONDUCTORS
- \* PRODUCT REQUIRES A CONDUCTIVE LOAD BAR
- \* SHIELDED VERSION (SPECIAL HEIGHT) MODULAR PLUG
- \* FOR CABLE DIAMETERS UP TO .310 DIAMETER

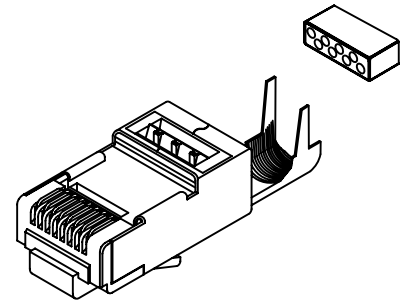

### SPECIFICATIONS :

"PATENTED"

#### CONTACT MATERIAL:

PHOSPHOR BRONZE - .012 THK

#### CONTACT PLATING:

50 MICRO-INCH : OTHER PLATING OPTIONS AVAILABLE  
SELECTIVE 24 CARAT HARD GOLD PLATE IN CONTACT AREA  
OVER 100 MICRO-INCH MINIMUM NICKEL PLATE  
PER CURRENT SELECTIVE GOLD PLATING REQUIREMENTS.

#### PLUG MATERIAL:

POLYCARBONATE

#### SHIELD MATERIAL:

.012 THK CDA-260 1/4 HARD BRASS

#### SHIELD PLATING:

100% TIN, 100-150 MICRO-INCH TIN PLATED

#### PLUG TOLERANCES AND DIMENSIONS:

COMPLIES WITH F.C.C REQUIREMENTS

#### FLAME AUTO EXTINGUISH

94-V0 - File# E188111

#### OPERATION TEMPERATURE:

-40°C TO +70°C

#### INSERTION/EXTRACTION LIFE:

1000 CYCLES

#### CONTACT RESISTANCE:

10 MILLOHMS MAX.

#### CURRENT/VOLTAGE:

30 VAC/42 VDC AT 1.5 AMPS

(RoHS COMPLIANT)

Purchase at

**LANshack**

Sales@LANshack.com | 888-568-1230