

NOTES: THIS IS A GENERAL DEPICTION OF QUICKTREX ASSEMBLY BUILD SPECIFICATIONS. FOR FURTHER CUSTOMIZATION CONTACT LANSHACK.



PRE-TERMINATED FIBER OPTIC CABLE ASSEMBLY BUILD SPECIFICATIONS

1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. CONNECTORS MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3.
3. ALL FIBER WILL BE CORNING GLASS OR EQUIVALENT.
4. ALL MULTI-STRAND FIBER ASSEMBLIES WILL BE CONSTRUCTED USING 2 MM FURCATION TUBING BREAKOUT FOR EACH STRAND.
 - 4.1. TUBING WILL BE COLOR CODED OR SEQUENTIALLY LABELED.
5. THE BUFFER TUBES WILL BE FASTENED TO THE OUTER JACKET USING HEAT SHRINK TUBING.


HEAT SHRINK TUBING WILL BE USED AT:

 - 5.1. THE TRANSITION FROM THE BUFFER TUBES TO THE CABLE JACKET.
 - 5.2. WHERE THE BASKET MEETS THE TURN BUCKLE (PULLEYE HOOK).
 - 5.3. WHERE THE BASKET ENDS AND THE CONNECTS WITH THE CABLES JACKET.
6. ONE WRAP AROUND LABEL IS ATTACHED TO EACH END FOR IDENTIFICATION. THE LABEL WILL INCLUDE THE PART # AND AN INDIVIDUAL SERIAL NUMBER.
7. THE BREAKOUT AND CONNECTORS WILL BE PACKAGED IN CLEAR STRETCH PLASTIC TO PROTECT FROM CONTAMINANTS.
8. OPTIONAL PULLEYES / BASKETS ARE MADE FROM SUPER STRONG POLYETHYLENE MESH AND FEATURE A FREE SPINNING BUCKLE TO ELIMINATE TWISTING OF THE CABLE DURING THE PULL.
9. BREAKOUT LENGTHS VARY DEPENDING ON STRAND COUNT.
 - 9.1. 2 AND 4 STRAND ASSEMBLIES: 14"
 - 9.2. 6 STRAND ASSEMBLIES: 18"
 - 9.3. 12 STRAND ASSEMBLIES: 24"
 - 9.4. 24 STRAND ASSEMBLIES: 36"
 - 9.5. CONNECTORS ARE STAGGERED
 - 9.6. CONNECTOR ONE IS THE LONGEST STRAND
10. ALL FIBER ENDS ARE 100% TESTED FOR OPTICAL PERFORMANCE AND INSPECTED WITH A FIBERSCOPE OF 400 POWER OR MORE FOR SURFACE DEFECTS INCLUDING CRACKING, PITTING, AND SCRATCHES ON THE GLASS SURFACE. ALL ENDS ARE TESTED UTILIZING A PROFESSIONAL GRADE LOSS TEST SET TO THE FOLLOWING STANDARDS:

MULTIMODE: 62.5/125 & 50/125: IL MAX 0.2DB, MIN -0.1DB
SINGLEMODE: IL MAX 0.2dB MIN -0.1dB ORL (OPTICAL RETURN LOSS) -55dB


REV	ECR	DESCRIPTION	BY	DATE	CHECKED
C	-	QUICKTREX BUILD SPECIFICATIONS	T.D.	6/11/2021	A.D.

MANUFACTURED IN THE USA | TAA COMPLIANT

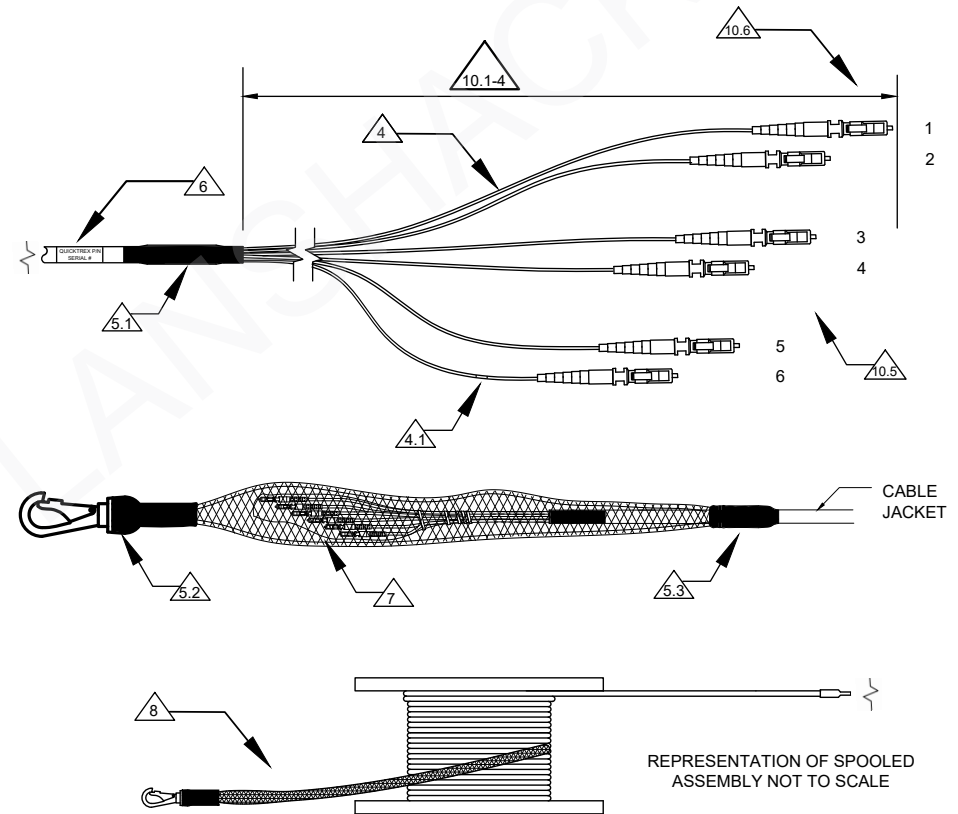

NOTE: ASSEMBLIES 100FT AND OVER WILL COME ON A SPOOL. ASSEMBLIES UNDER 100FT WILL BE AIR SPOOLED

DESCRIPTION: THIS IS A SAMPLE REPRESENTATION OF STANDARD QUICKTREX BUILD SPECIFICATIONS

DRAWN BY:	T. DAMIANO	08/17/2020	 1-888-568-1230 or Sales@LANshack.com		
APVD BY:	A. DAMIANO	08/18/2020			
DIMENSIONS: METRIC [IMPERIAL]			TITLE: QuickTrex Pre-Terminated Fiber Optic Cable Assemblies		
PROPRIETARY AND CONFIDENTIAL <small>THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF LANSHACK. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.</small>			SIZE A	DWG. NO. QT-PFOA-B-SPECS-100	REV D
			SCALE: NOT TO SCALE		SHEET 1 OF 1

QUICKTREX BUILD MATERIAL LIST			CONNECTOR OPTIONS	
ITEM	QTY	COMPONENT		
8	VARIES	SWIVEL PULLING EYE & MESH BASKET		
7	1	SPOOL		
7	1	REEL LABEL		
6	2	QUICKTREX CABLE LABEL		
5	VARIES	HEAT SHRINK TUBING		
4	1	TEST REPORT		
3	2	SINGLE LEG BREAKOUT: FIBER STRANDS, 2.0mm FURCATION TUBING		
2	1	CORNING GLASS OR EQUIVALENT DISTRIBUTION FIBER		
1	VARIES	FIBER OPTIC CONNECTORS		
			POLISH TYPES: PC, UPC, APC	
			ISO 9001 CERTIFIED	