

96 & 144 Fiber Dry Loose Tube Indoor-Outdoor Cable, Plenum

Features and Benefits

- Gel-Free waterblocking design
- UV protected rugged jacket
- 96 & 144 fiber count
- Available in all fiber types

Description

This multi-tube Dry Loose Tube Indoor-Outdoor Cable is composed of eight and twelve buffer tubes, water blocking yarn, a central strength member, an aramid ripcord, and a PVDF outer jacket. Each buffer tube consists of a 12 colored glass fibers and water-swellaable yarn with a PVDF jacket 2.5mm in diameter. All component materials meet the EU RoHS and REACH Directive standards. Buffer tubes may be color-coded or sequentially numbered.



This Dry Loose Tube is available in carbon black or special-order colors (including 12 TIA standard colors). UL Listed OFNP cables are available, and unrated cables may be supplied to accommodate special needs. Standard surface print denotes construction, NEC rating, and fiber type, and includes footage markers. Custom print may also be accommodated.

Application

Plenum
Duct
Indoor/Outdoor

Flame Rating

NFPA 262
FT6

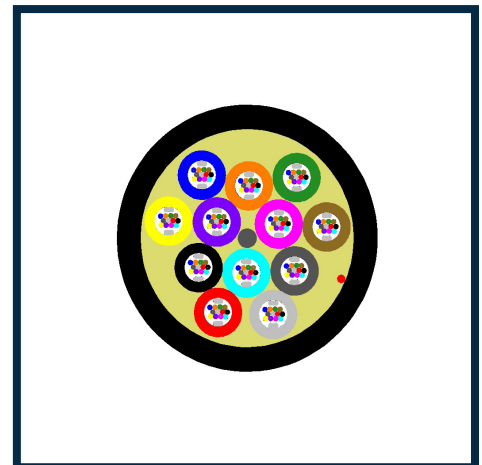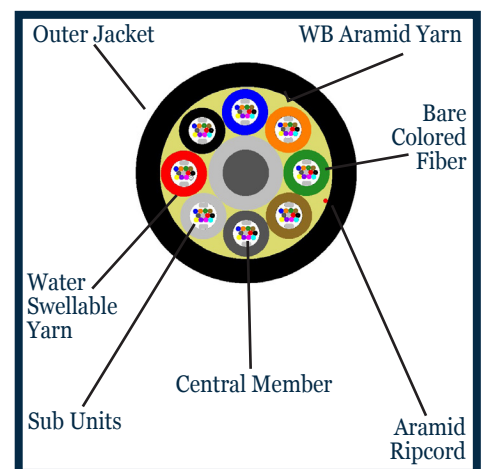

Purchase at

LANshack

Sales@LANshack.com | 888-568-1230

SPECIFICATIONS

Temperature Range	
Storage Temperature	-40 C to +70 C
Operating Temperature	-40 C to +70 C

Cable Characteristics	
Fiber Count	96/144
Outer Jacket Material	PVDF
Buffer Tubes	PVDF
Strength Member	Aramid Yarn
Central Strength Member	Fiber Reinforced Rod
Coating on Central Strength Member	Flame Retardant PVC(if applicable)

Physical Characteristics	Value 96/144 (fiber count)
Nominal Outer Diameter (mm)	12.0/ 13.0
Weight (lbs/ km)	325/ 388
Minimum Bend Radius, Installation (cm)	18.0/ 19.5
Minimum Bend Radius, Operation (cm)	12.0/13.0

Optical Characteristics						
Items	Single Mode	OM1	OM2	OM3	OM4 (OM4+)	OM5 WB MMF
Core Size [μm]	9	62.5	50	50	50	50
Wavelength [nm]	1,310/1,550	850/1,300	850/1,300	850/1,300	850/1,300	850/1,300
Max. Attenuation [dB/km]	0.5/0.4	3.5/1.5	3.5/1.5	3.0/1.0	3.0/1.0	3.0/1.0
Link Length [m]	10,000/5,000 (1/10 Gb/s@1550nm)	300 (1Gb/s@850nm)	150 (10Gb/s@850nm)	300 (10Gb/s@850nm)	550(600) (10Gb/s@850nm)	550 (10Gb/s@850nm)
Bandwidth (EMB High Performance) [MHZ.km]		220 @850	750 @850	2,000 @850	4,700 @850	4,700 @850

Part Numbers			
Fiber Count	Single Mode	OM1	OM2-OM5
96	S09DL96**NPBL25	M62DL96**NPBL25	M50DL96**NPBL25
144	S09DL144**NPBL25	M62DL144**NPBL25	M50DL144**NPBL25

Fiber Type (9/125)	**	Fiber Type (50/125)	**	Fiber Type (62.5/125)	**
SMF-28 Ultra	CZ	ClearCurve OM2	C2	InfiniCor 300	C3
ClearCurve LBL	C7	Clear Curve OM3	CG		
ClearCurve ZBL	CC	ClearCurve OM4	C4		
		ClearCurve OM5	C5		