


NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description

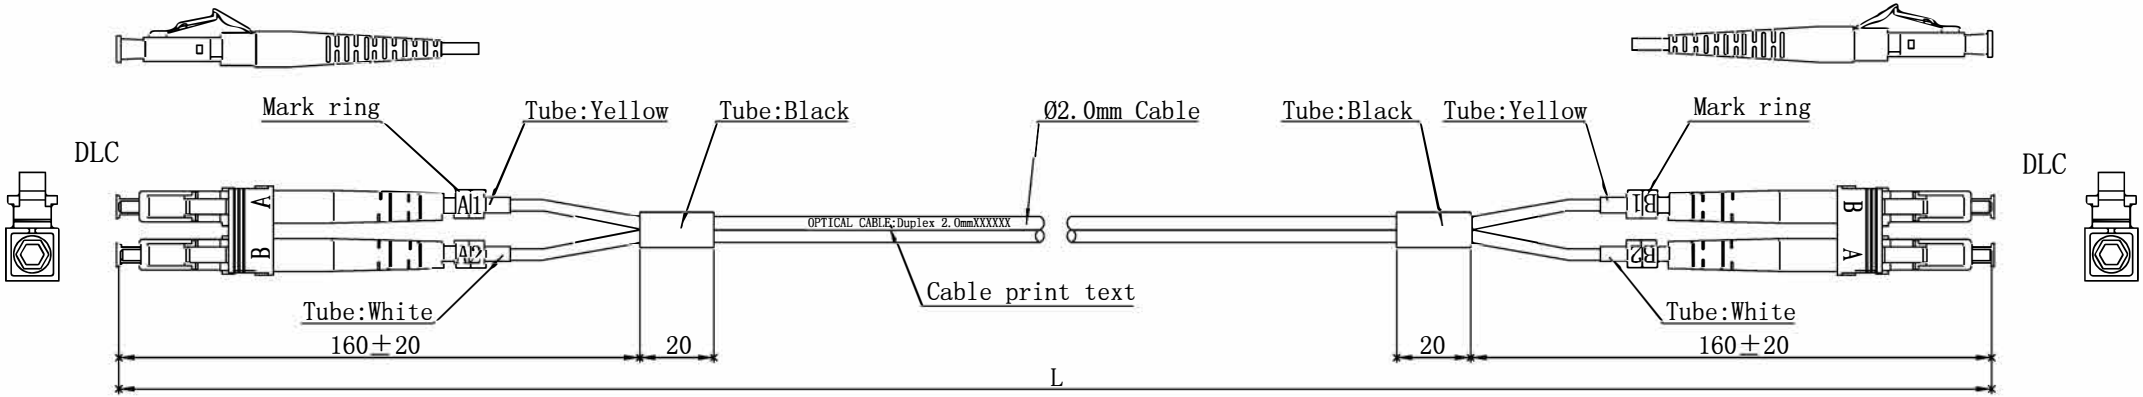


Specifications:

Type	DLC/UPC-DLC/UPC
Fiber Mode	SM
Core Diameter(um)	9/125
Operating Wavelength(nm)	1310/1550
Cable Color	Yellow
Cable Diameter(mm)	Ø2.0
Operating Temperature(° C)	-40~+75
Storage Temperature(° C)	-40~+85
Insertion loss(dB)	≤0.3dB
Return loss(dB)	≥50dB

L ≤ 5m, TOLERANCES: 0 ≤ ΔL ≤ 5cm
 L > 5m, TOLERANCES: 0 ≤ ΔL ≤ 1%*L

Remarks:

Length	Item #
1m	SCSC01
1.5m	SCSC01.5
2m	SCSC02
3m	SCSC03
4m	SCSC04
5m	SCSC05
6m	SCSC06
7m	SCSC07
8m	SCSC08
9m	SCSC09
10m	SCSC10
12m	SCSC12
15m	SCSC15
20m	SCSC20
25m	SCSC25
30m	SCSC30

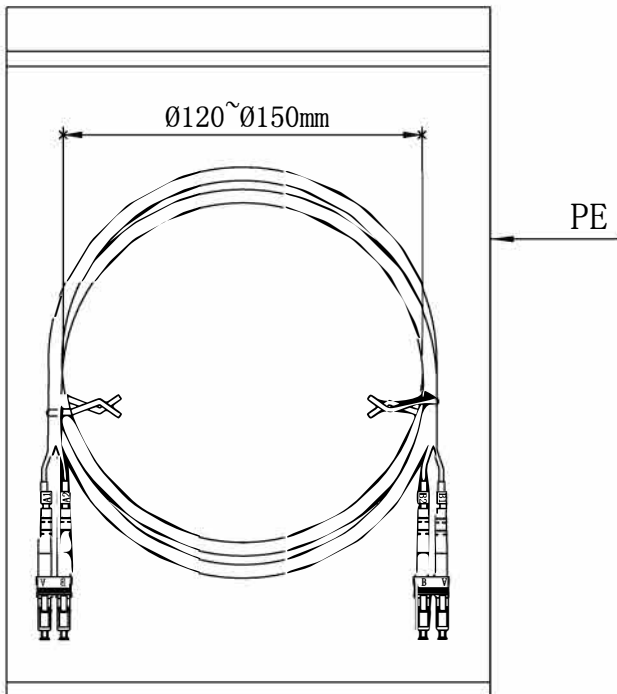


 Purchase @ LANshack.com Contact Sales at 888-568-1230 or Email us at Sales@LANshack.com

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
①				
②				
③				

Unless specified on the drawing, tolerances are per the follows:

.x	+1
.xx	+0.2
.xxx	+0.05

DRAWN BY	DATE: 2015/05/14	DESCRIPTION: LC-LC-DX SM Patchcord
CHECKED BY	SHEET 1 of 1	ITEM NO.
APPROVED BY	SCALE 1:1	REV. 00 UNIT:mm