


NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION


Rev.	Rev. Date	Modified By	Brief Description

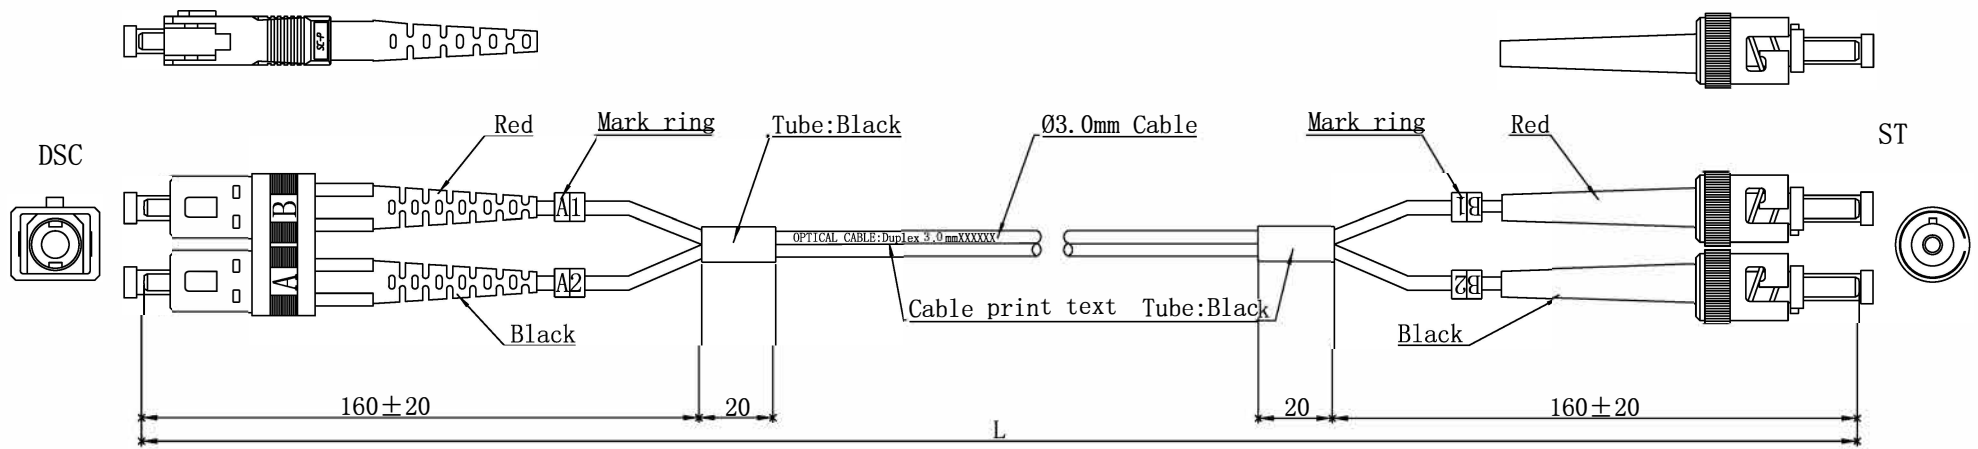

Specifications:

Type	DSC/UPC-ST/UPC
Fiber Mode	OM3
Core Diameter (um)	50/125
Operating Wavelength (nm)	850/1300
Cable Color	Aqua
Cable Diameter (mm)	Ø3.0
Operating Temperature (° C)	-40~+75
Storage Temperature (° C)	-40~+85
Insertion loss (dB)	≤0.3dB
Return loss (dB)	≥35dB
SC Connector Color (Boot)	Red/Blcak
ST Connector Color (Boot)	Red/Blcak

L ≤ 5m, TOLERANCES: 0 ≤ ΔL ≤ 5cm
 L > 5m, TOLERANCES: 0 ≤ ΔL ≤ 1%*L

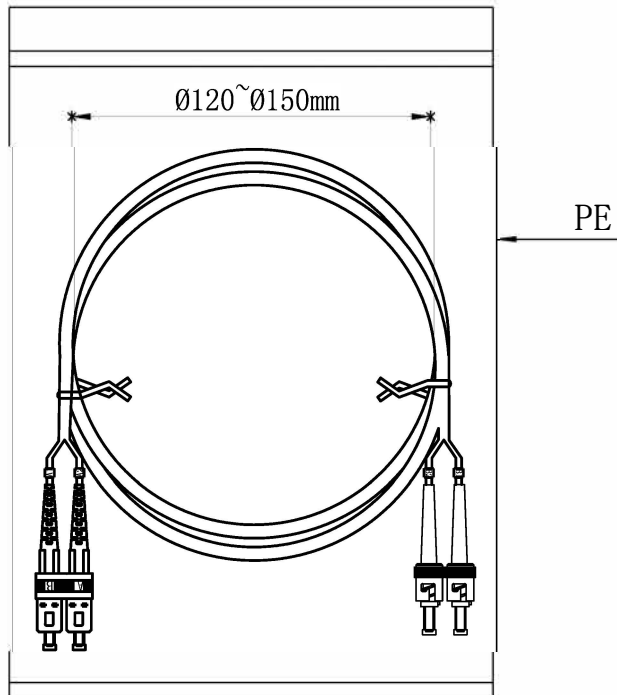



 Purchase @

LANshack

 .com

 Contact Sales at 888-568-1230

 or

 Email us at Sales@LANshack.com

LANshack Stock Fiber Optic Patch Cables

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
①				
②				
③				

Unless specified on the drawing, tolerances are per the follows:

.x +1
 +0.2
 .xx +0.05

DRAWN BY	DATE: 2015/05/14	DESCRIPTION: SC-ST-DX OM3 Patchcord
CHECKED BY	SHEET 1 of 1	ITEM NO.
APPROVED BY	SCALE 1:1	REV. 00 UNIT: mm