

4

3

2

1

D

D

C


C

B

B

A

A

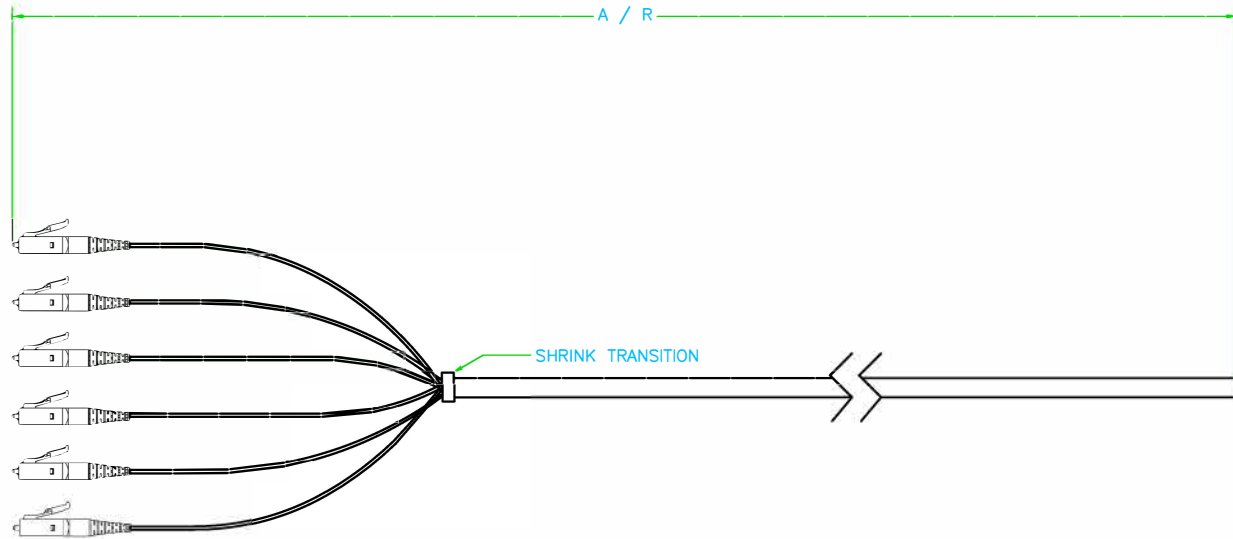

PRODUCT INFORMATION:

- 1.) OM4 50/125 MULTIMODE LASER OPTIMIZED
- 2.) TYPICAL ATTENUATION 2.8dB/km @ 850nm & 1.0db/km @ 1300nm + ≤ .5dB PER MATED PAIR
- 3.) STANDARD LENGTH TOLERANCE +/- 5%
- 4.) ASSEMBLIES ARE AQUA
- 5.) SERIALIZED FOR TEST DATA TRACKING
- 6.) TERMINATED WITH STANDARD POLISH CONNECTORS
- 7.) DRAWING MAY NOT BE TO SCALE
- 8.) ACTUAL PRODUCT MAY VARY FROM THE DRAWING



FILE NAME			
CONTRACT NO N/A			
DRAWN 03/15/18 JOELH		SFPTK-OM4-LC-6 LC/BLUNT OM4 6F PIGTAIL	
CHECK 03/15/18 JOSH W			
APPR. 03/15/18 JOSH W			
ISSUED 03/15/18 JOELH			
SIZE	FSCM NO	DWG NO	REV
C			A
SCALE	1'0"=1'0"	WEIGHT	N/A
SHEET		1 OF 1	

4

3

2

1