
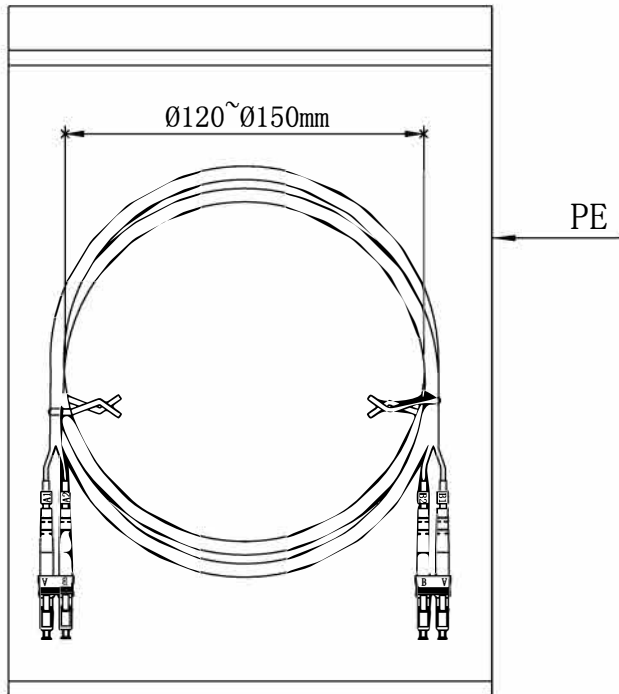


NOTE:ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION

Rev.	Rev. Date	Modified By	Brief Description

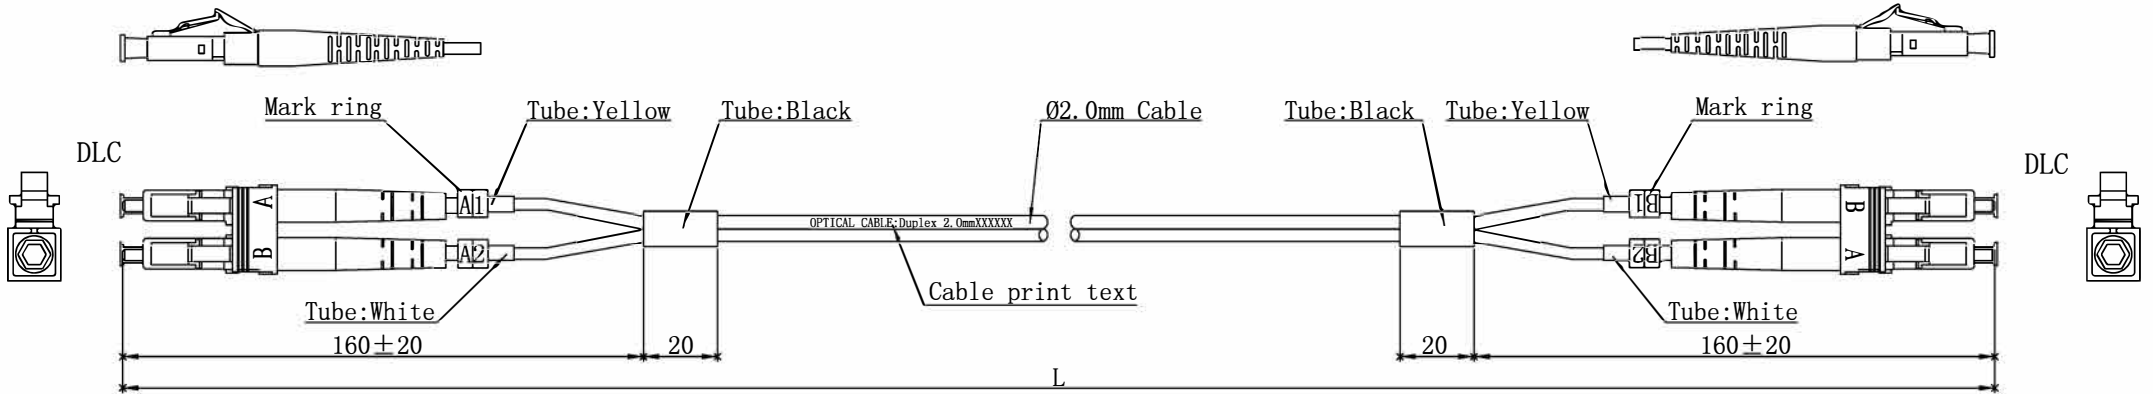

Specifications:

Type	DLC/UPC-DLC/UPC
Fiber Mode	OM3
Core Diameter (um)	50/125
Operating Wavelength (nm)	850/1300
Cable Color	Aqua
Cable Diameter (mm)	Ø2.0
Operating Temperature (° C)	-40~+75
Storage Temperature (° C)	-40~+85
Insertion loss (dB)	≤0.2dB
Return loss (dB)	≥35dB

$L \leq 5m, TOLERANCES: 0 \leq \Delta L \leq 5cm$
 $L > 5m, TOLERANCES: 0 \leq \Delta L \leq 1\% * L$

Length
1m
1.5m
2m
3m
4m
5m
6m
7m
8m
9m
10m
12m
15m
20m
25m
30m
35m
40m
50m



Contact Sales at 888-568-1230
 or
 Email us at Sales@LANshack.com

LANshack Stock OM3 Patch Cable

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
①				
②				
③				

Unless specified on the drawing, tolerances are per the follows:

.x	+1
+0.2	
.xx	+0.05

DRAWN BY	DATE: 2015/05/14	DESCRIPTION: LC-LC-DX OM3 Patchcord
CHECKED BY	SHEET 1of1	ITEM NO.
APPROVED BY	SCALE 1:1	REV. 00
		UNIT:mm

