

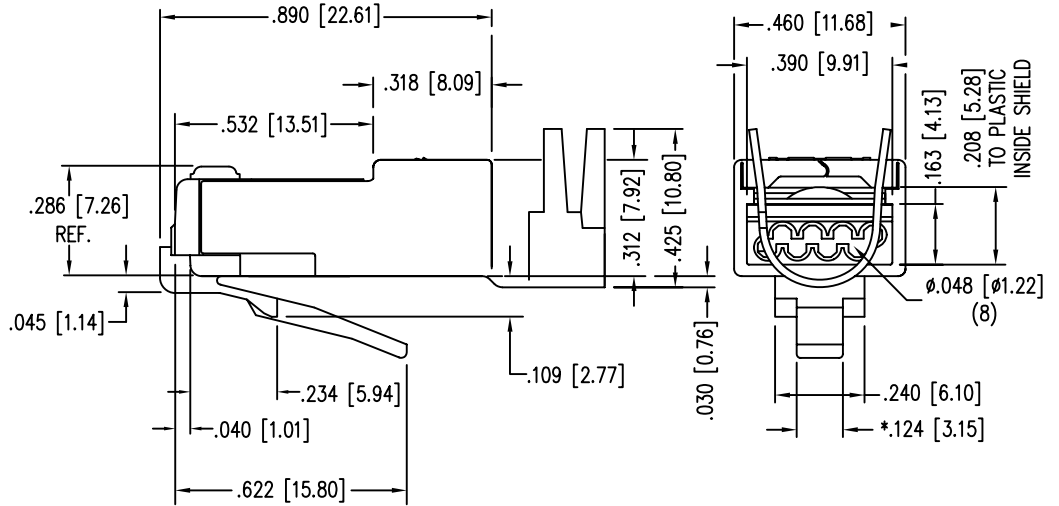
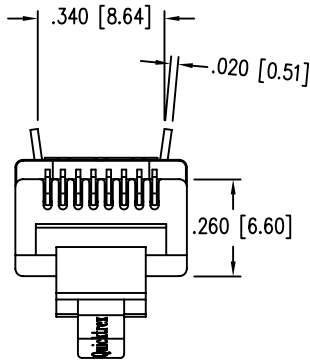
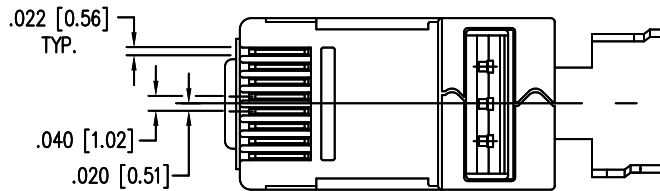




QuickTrex™ Category 6A Shielded Modular Plugs w/ Loadbar - Bag of 50

Part no: **QT-LS6AS-P50**

- * EIGHT CONDUCTOR MODULAR PLUG
- * FOR HIGH SPEED APPLICATION
- * FOR CONDUCTORS WITH AN O.D. RANGE OF .044 – .048
- * USE FOR SOLID OR STRANDED CONDUCTORS
- * PRODUCT REQUIRES A CONDUCTIVE LOAD BAR (PT. No. LB006)
- * SHIELDED VERSION (SPECIAL HEIGHT) MODULAR PLUG
- * FOR CABLE DIAMETERS UP TO .310

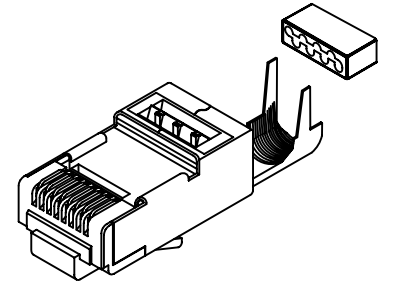

"PATENTED"

SPECIFICATIONS :

PERFORMANCE:

EXCEEDS CATEGORY 5 EIA/TIA 2840, ANNEX B SPECIFICATION
PERFORMANCE TUNED TO CABLES MEETING CATEGORY 6 SPECIFICATIONS.

CONTACT MATERIAL:

PHOSPHOR BRONZE - .012

CONTACT PLATING:

50 MICRO-INCH : OTHER PLATING OPTIONS AVAILABLE
SELECTIVE 24 CARAT HARD GOLD PLATE IN CONTACT AREA
OVER 100 MICRO-INCH MINIMUM NICKEL PLATE
PER CURRENT SELECTIVE GOLD PLATING REQUIREMENTS.

SHIELD MATERIAL:

CDA-260 1/4 HARD BRASS .012 EXCEPT WHERE NOTED .020

SHIELD PLATING:

100% TIN 100-150 MICRO INCH TIN PLATED

PLUG MATERIAL:

POLYCARBONATE

PLUG TOLERANCES

COMPLIES WITH F.C.C REQUIREMENTS

AND DIMENSIONS:

FLAME AUTO EXTINGUISH

94-V0 - File# E188111

OPERATION TEMPERATURE:

-40°C TO +70°C

INSERTION/EXTRACTION LIFE:

1000 CYCLES

CONTACT RESISTANCE:

10 MILLOHMS MAX.

CURRENT/VOLTAGE:

30 VAC/42 VDC AT 1.5 AMPS

(RoHS COMPLIANT)



To find a distributor of this product go to:
<http://www.quicktrex.com/distributors>