


NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rec.	Rec. Date	Modified By	Brief Description

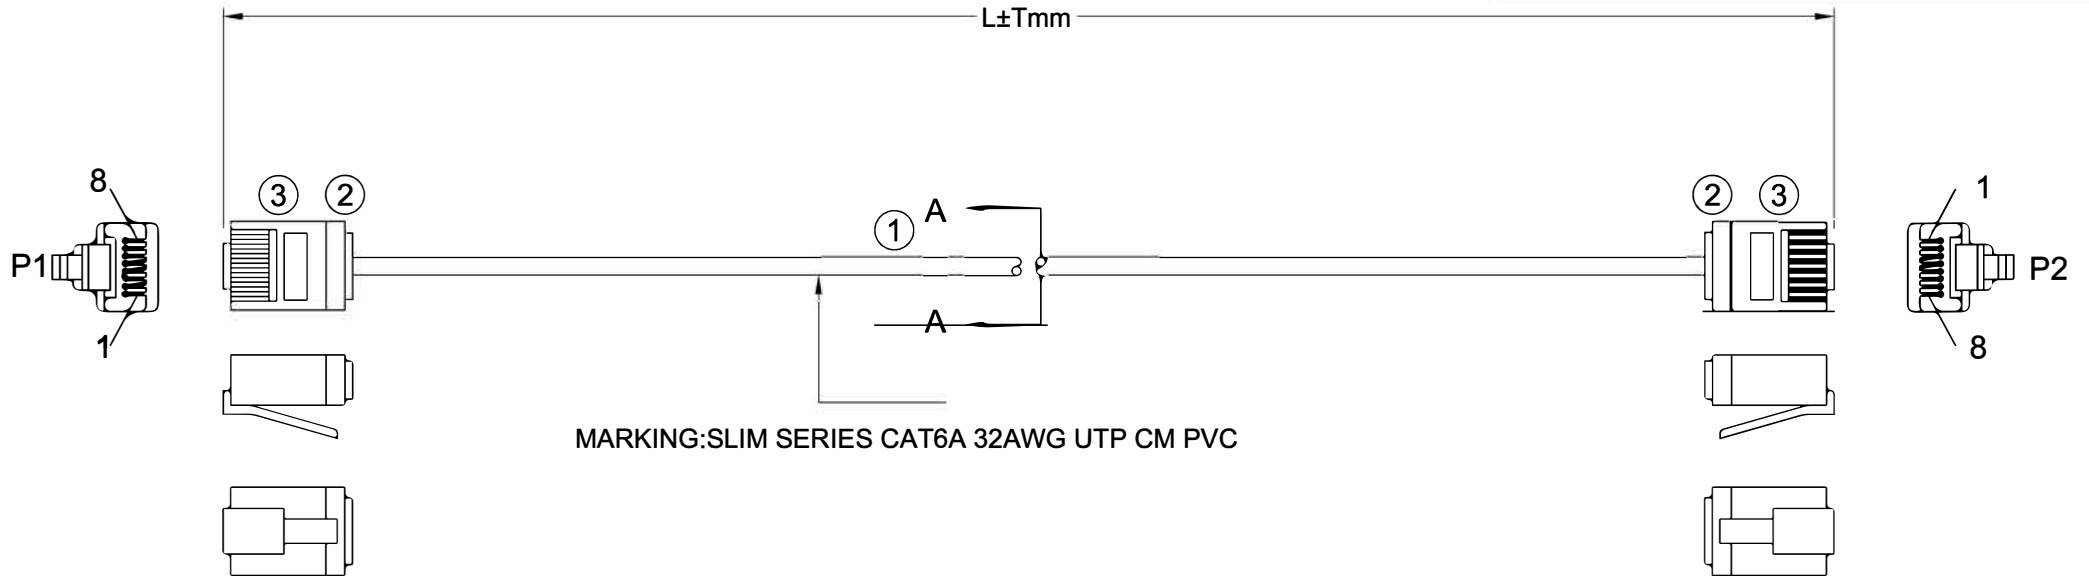

MARKING: SLIM SERIES CAT6A 32AWG UTP CM PVC


JACKET: PVC Thickness: 0.55±0.1mm
 OD=2.6±0.15mm
 INSULATION: HDPE Thickness: 0.1±0.05mm
 OD=0.45±0.05mm
 CONDUCTOR: 32AWG(7/0.08±0.008mmBC)*4P

SEC:A-A

orange 1	green 2
white/orange	white/orange
blue 3	brown 4
white/blue	white/brown

PINOUT		
P1	WIRE	P2
1	WHITE/ORANGE	1
2	ORANGE	2
3	WHITE/GREEN	3
6	GREEN	6
5	WHITE/BLUE	5
4	BLUE	4
7	WHITE/BROWN	7
8	BROWN	8

L(ft)	T(inch)	T(%)
1	±1.2	10%
1.5	±1.2	6.6%
2	±1.2	5%
3	±1.2	3.33%
4	±1.2	2.5%
5	±1.2	2%
6	±1.2	1.67%
7	±2	2.38%
10	±2	1.67%



Purchase @ **LANshack.com**
 Contact Sales 888-568-1230
 Email Sales@LANshack.com

DRAWN BY LY	DATE: 2019/07/10	DESCRIPTION: UTP Cat 6A PATCH CORD ITEM
CHECKED BY MTC	SHEET 1 of 1	NO. C6A-UTE-SPC
APPROVED BY	SCALE 1:1	REC. 00

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
③	RJ45 PLUG	8P8C 50U" GOLD PLATED TWO-PIECE PLUG.		
②	MOLDED	PVC SHORT MOLDED BOOT		
①	CABLE	CAT6A UTP 4P/32AWG(7/0.08±0.008MM BC) OD=2.6±0.15mm		